
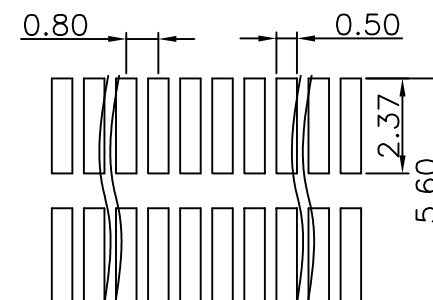
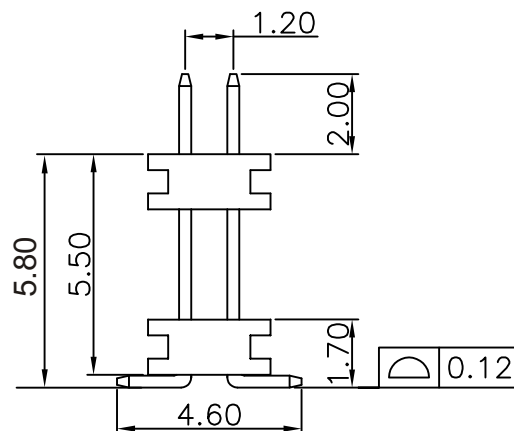
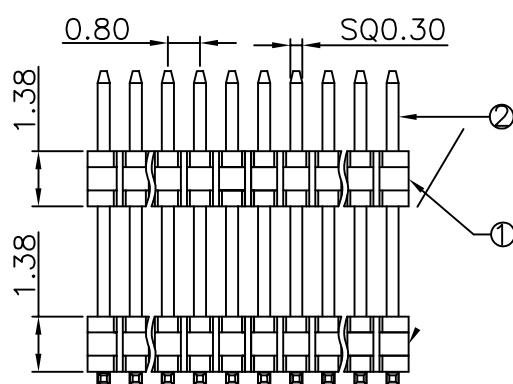


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.3$$

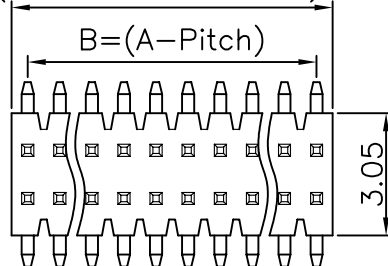

P.C.B LAYOUT

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass C2700	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XXX
Normal Force : 450 Grams Average . Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

H8S-V058X20-2Xxx-LF
 SERIES | CONTACT 2.0mm | LEADFREE
 NON POST | 2X02:04 WAY
 HIGH 5.8mm | 2X50:100 WAY
 180°SMT

DESCRIPTION: 0.8 Pin Header Dual Row SMT Type Base H=1.38