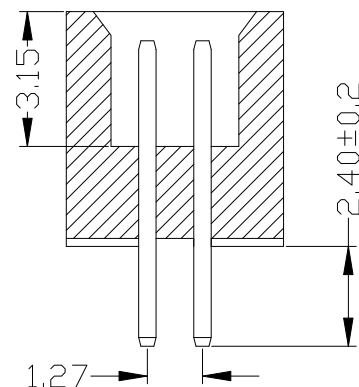
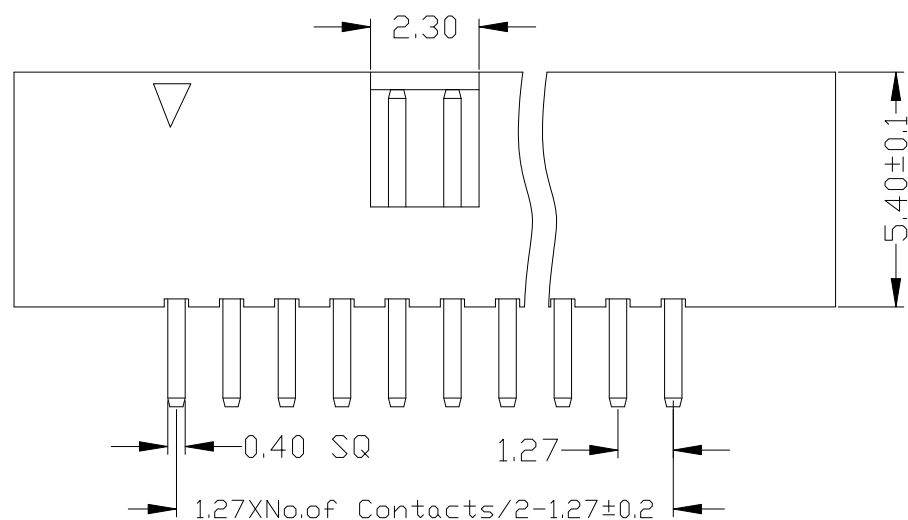
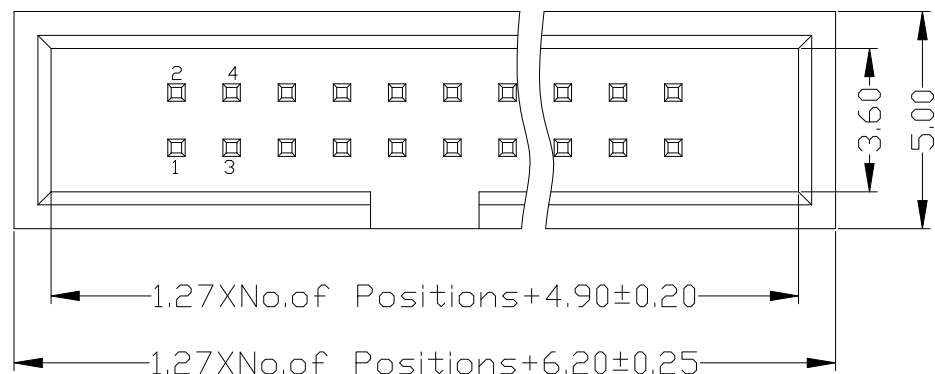


Specifications

1. MATERILA:

Housing: LCP+30%G.F UL94V-0, Color: Black

Contact: Brass, GOLD FLASH PLATING OVER ALL

30u" NICKEL UNDERPLATING OVER ALL

2. characteristics:

Raring Current: 1AMP

Contact Resistance: 20MΩ MAX.

Insulating Resistance: 1000MΩ MIN.

WithstWanding Voltage: AC 500V/Minute.

Temperture Range: -40℃ to +105℃

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

HAB-D-xxx-LF
SERIES LEADFREE
010~100WAY
180°SMT

DESCRIPTION: 1.27mm簡牛 膠高5.4 180度