

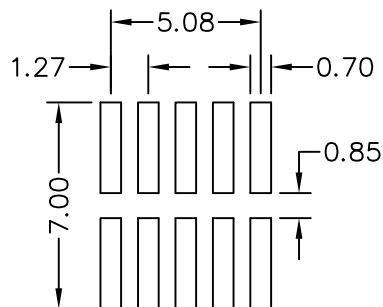
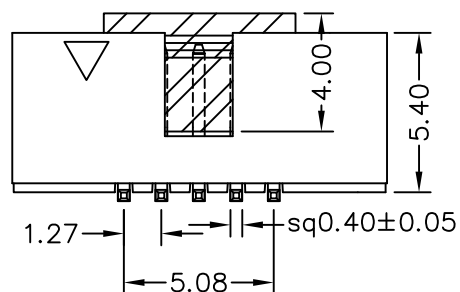


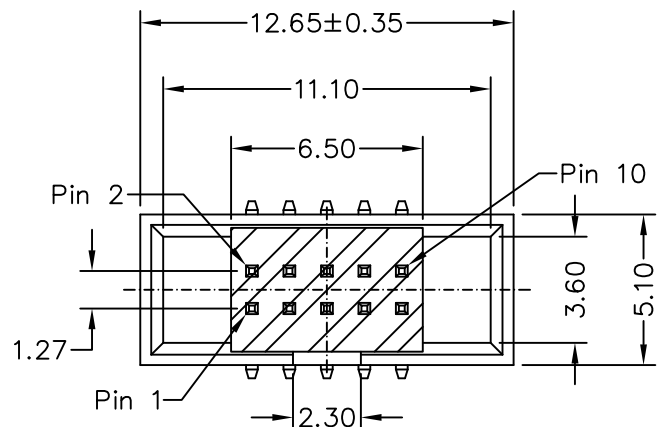

Recommended P.C.B Layout

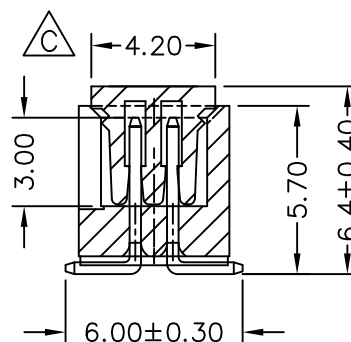

MATERIAL

Insulator : NY6T-E,UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 10mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

HAB-VC-010-LF
SERIES | LEADFREE
10 WAY
CAP
180°SMT

DESCRIPTION: BOX HEADER 1.27*1.27mm SMT TYPE,CAP+T/R