

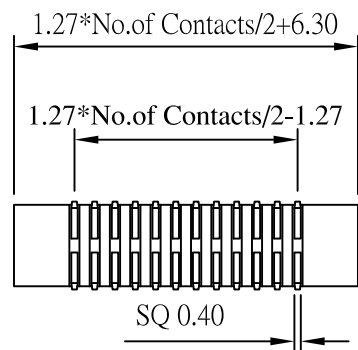
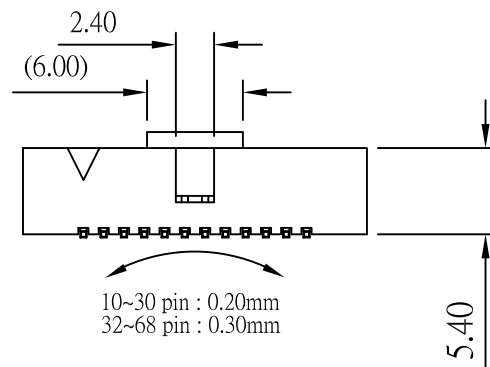


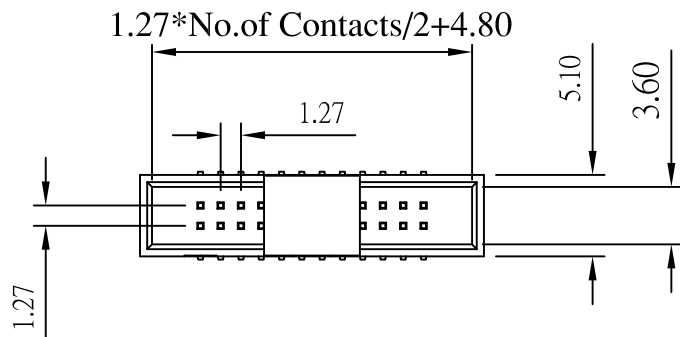


Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: LCP
 Finish: Standard:Gold Flash all over

Table-1

CIRCUITS	
10	30
12	34
14	40
16	44
20	50
24	60
26	64
28	68

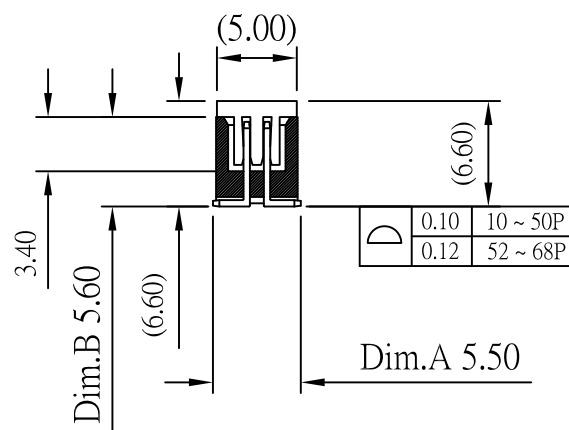

Recommended P.C. Board
 SMD Layout

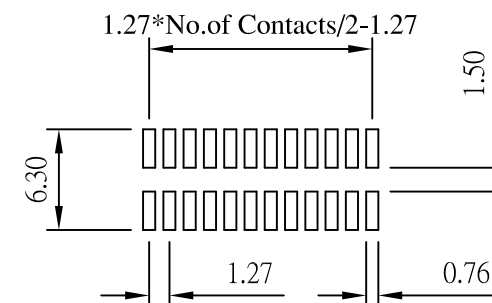

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

HAB-VCR-xxx-LF
 SERIES REEL CAP 180° SMT
 LEADFREE
 010~100WAY


DESCRIPTION:

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-3 requirements
6. 22" 1R= 27M 2100 PCS 13"1R= 9M 700PCS

CIRCUITS	W	B0	F	CIRCUITS	W	B0	F
06 pin	24	10.41	10.50	54 pin	72	40.89	34.20
08 pin	32	11.68	14.20	56 pin	72	42.16	34.20
# 10 pin	32	12.95	14.20	58 pin	72	43.43	34.20
12 pin	32	14.22	14.20	60 pin	72	44.7	34.20
14 pin	32	15.49	14.20	62 pin	72	45.97	34.20
* 16 pin	44	16.76	20.20	64 pin	72	47.24	34.20
18 pin	44	18.03	20.20	66 pin	72	48.51	34.20
* 20 pin	44	19.30	20.20	68 pin	72	49.78	34.20
22 pin	44	20.57	20.20	70 pin	72	51.05	34.20
24 pin	44	21.84	20.20	72 pin	72	52.32	34.20
26 pin	44	23.11	20.20	74 pin	72	53.59	34.20
28 pin	44	24.38	20.20	76 pin	72	54.86	34.20
30 pin	44	25.65	20.20	78 pin	88	56.13	42.20
32 pin	44	26.92	20.20	80 pin	88	57.40	42.20
* 34 pin	44	28.20	20.20	82 pin	88	58.67	42.20
36 pin	56	29.46	26.20	84 pin	88	59.94	42.20
38 pin	56	30.73	26.20	86 pin	88	61.21	42.20
40 pin	56	32.00	26.20	88 pin	88	62.48	42.20
42 pin	56	33.27	26.20	90 pin	88	63.75	42.20
44 pin	56	34.54	26.20	92 pin	88	65.02	42.20
46 pin	56	35.81	26.20	94 pin	88	66.29	42.20
48 pin	56	37.08	26.20	96 pin	88	67.56	42.20
50 pin	56	38.35	26.20	98 pin	88	68.83	42.20
52 pin	72	39.62	34.20	100 pin	88	70.10	42.20

Dimension							Carrier Tape
A	B ± 0.5	C ± 0.2	D ± 1.0	N ± 1.0	T ± 0.1	G ± 0.1	W
330	2.2	13	20.2	100	8.5	13.1	8
330	2.2	13	20.2	100	12.5	17.1	12
330	2.2	13	20.2	100	17	21.1	16
330	2.2	13	20.2	100	24.5	29.1	24
330	2.2	13	20.2	100	32.5	37.0	32
330	2.2	13	20.2	100	44.5	49.1	44
330	2.2	13	20.2	100	56.5	61.1	56
330	2.2	13	20.2	100	72.5	77.1	72
330	2.2	13	20.2	100	88.5	93.1	88

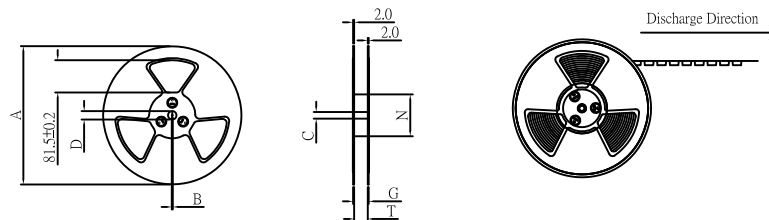


DEVICE TYPE:



MATERIAL :PS0.35透明

ITEM	A0	K0	K1	P	E	D	P0	P2
DIM	5.8 ^{+0.1} _{-0.1}	7.9 ^{+0.1} _{-0.1}	6.9 ^{+0.1} _{-0.1}	12 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}


TAPE TYPE 1 : FOR POSITION NUMBERS
06 THRU 08(TAPE WIDTH < 32mm)

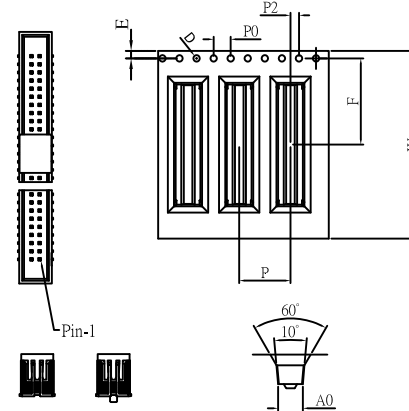


TAPE TYPE 2 : FOR POSITION NUMBERS
10 AND ABOVE(TAPE WIDTH ≥ 32 mm)



Discharge Direction →



Discharge Direction →



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

HAB-VCR-xxx-LF
SERIES LEADFREE
010~100WAY
REEL
CAP
180° SMT

DESCRIPTION: