


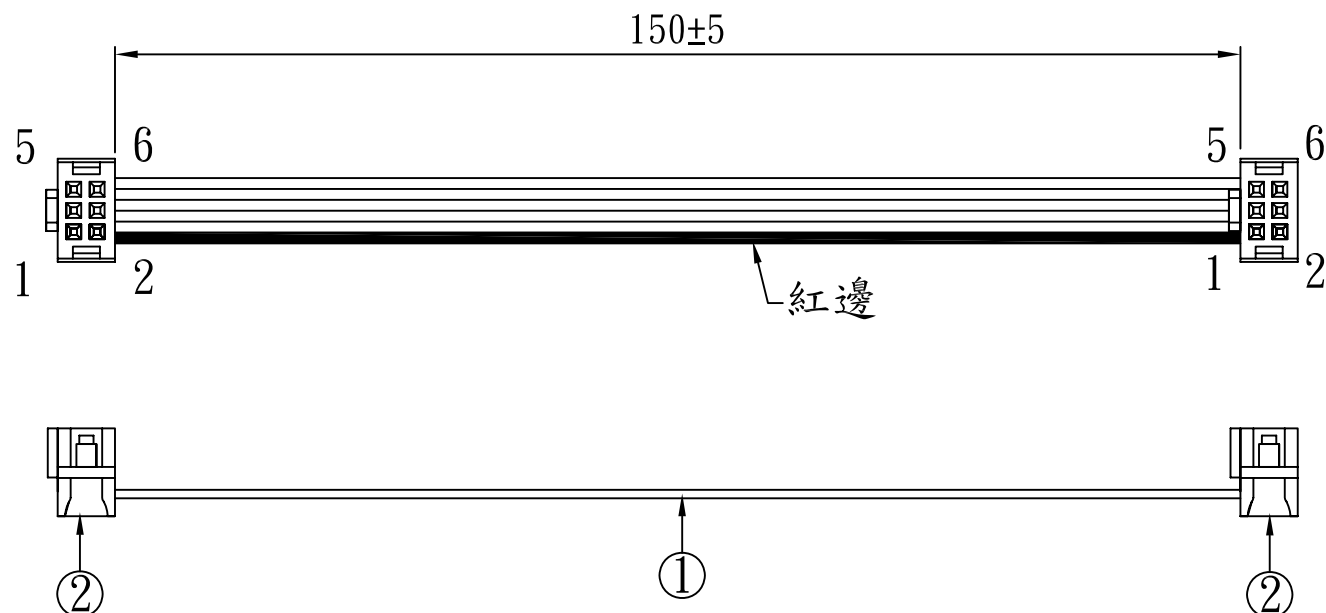

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

#### ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTA
3. INSULATION RESISTANCE: 5MΩ Min

| NO. | ITEM. | DESCRIPTION                     | Q'TY | UL/CSA No. |
|-----|-------|---------------------------------|------|------------|
| 1   | WIRE: | UL2678 30AWG 6P PH=0.635MM 灰色排線 | 1pcs |            |
| 2   | IDC:  | 6P 有凸點 有SR (兩件式) BLACK PH:1.27  | 2pcs |            |
|     |       |                                 |      |            |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

HAF2X2-0606-F15C-LF

SERIES

LEADFREE

150mm

FEMALE TO FEMALE

06 TO 06 WAY

DESCRIPTION: CABLE ASS"Y