



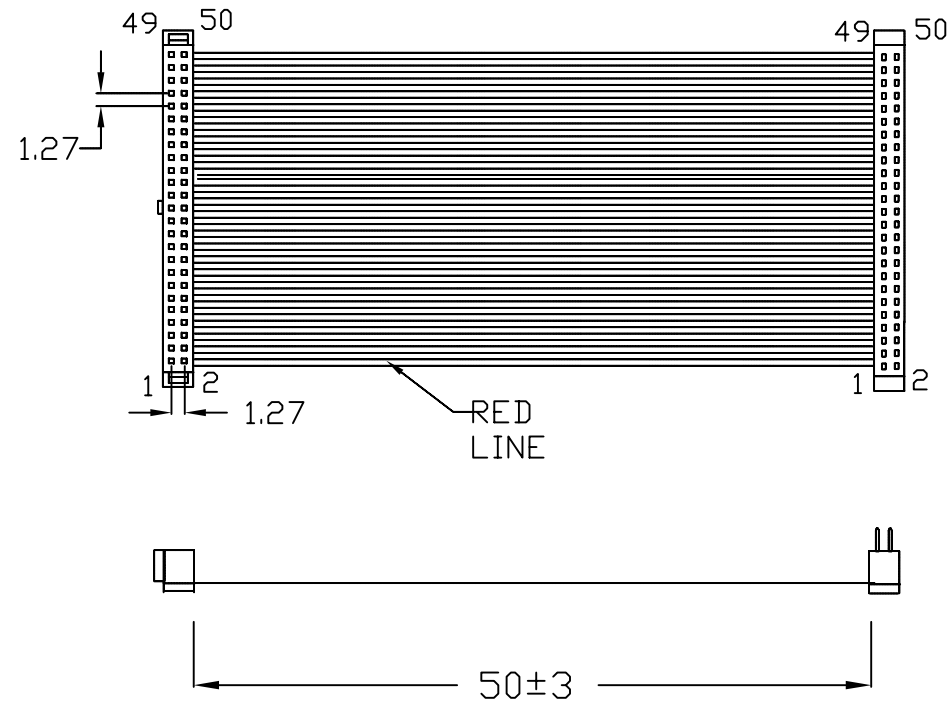

WIRING DIAGRAM

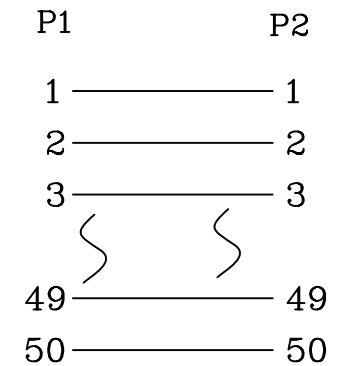

	COMPONENTS	DESCRIPTION
1	CONNECTOR	IDC SOCKET 50 PDS (1.27mm X 1.27mm)-ATEC
2	CONNECTOR	W/CENTER KEY,W/O STRAIN RELIEF.
3	CONNECTOR	DIP PLUG 50 PDS (1.27mm X 1.27mm)-ATEC
4	CABLE	FLAT CABLE 50C (0.635mm PITCH) UL2678 AWG30 PVC , SOLID COPPER CONDUCTOR.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HAFHAP-5050-A5C-LF

SERIES

LEADFREE

50mm

FEMALE TO MALE

50 TO 50 WAY

DESCRIPTION: 1.27*1.27 50P IDC SOCKET/DIP IDC L:50mm