
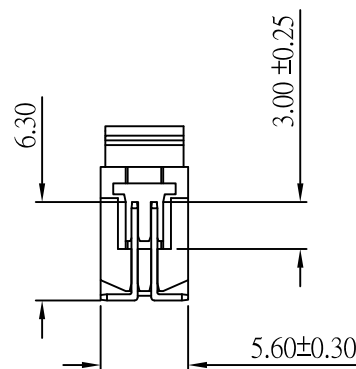
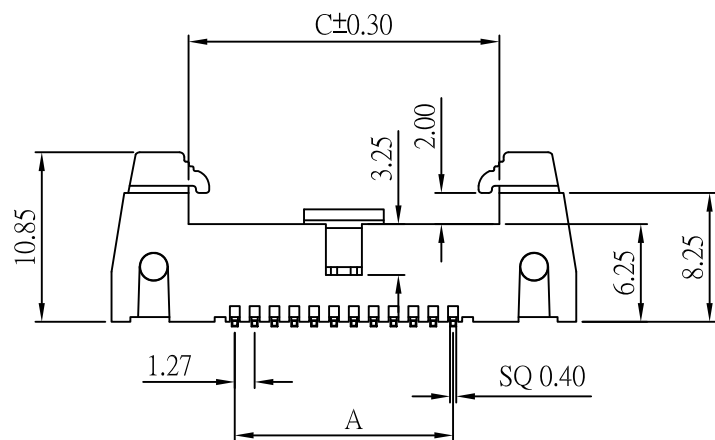
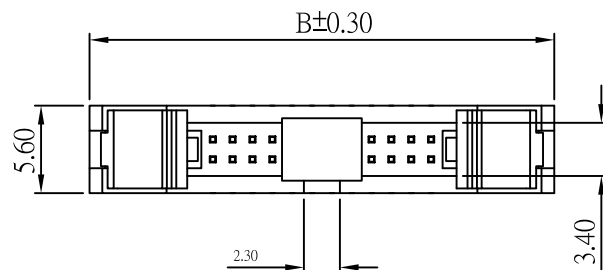


Recommended P.C. Board
Hole Layout

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +125° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Standard: LCP
Finish: Standard:Gold Flash all over

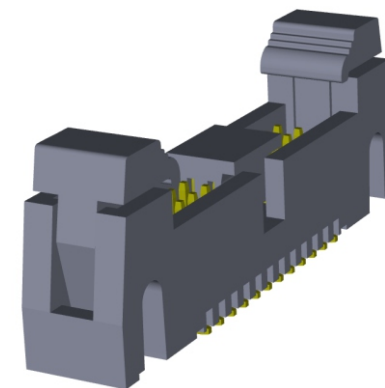

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
6	2.54	18.31	8.46	34	20.32	36.09	26.24
10	5.08	20.85	11.00	40	24.13	39.90	30.05
12	6.35	22.12	12.27	44	26.67	42.44	32.59
14	7.62	23.39	13.54	50	30.48	46.25	36.40
16	8.89	24.66	14.81	60	36.83	52.60	42.75
20	11.43	27.20	17.35	64	39.37	55.14	45.29
26	15.24	31.01	21.16	66	40.64	56.41	46.56
30	17.78	33.55	23.70	68	41.91	57.68	47.83

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HAL-VC-xxx-LF
SERIES LEADFREE
006-068 WAY
CAP
180° SMT

DESCRIPTION: