

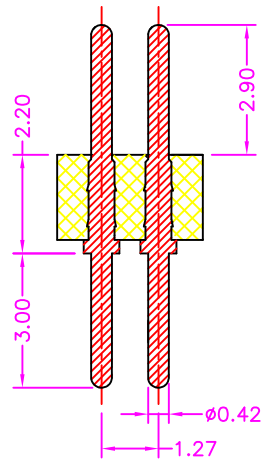
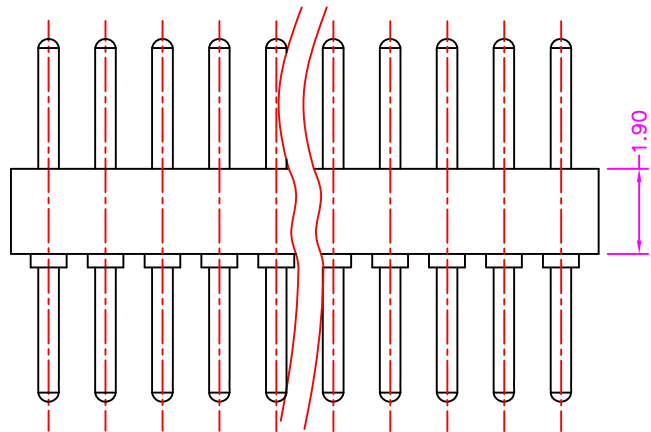


$$A = (\text{NUMBER OF POS. PER ROW} + 0.41) \times 1.27$$

$$B = (\text{NUMBER OF POS. PER ROW} - 1) \times 1.27$$

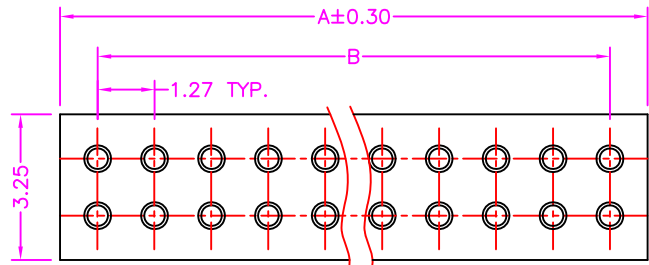

SECTION B-B

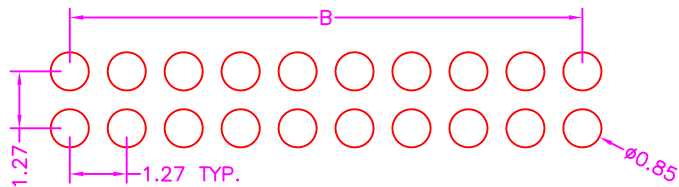

P.C.B. LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 600V AC FOR ONE MINUTE
INSULATION RESISTANCE: 5000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -55°C~+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

P PROJECTION

照片框

ORDER INFORMATION

HASP-DG-2Xxx-LF

SERIES | LEADFREE
2X02:04 WAY
2X50:100 WAY
GOLD
DIP 180°

DESCRIPTION: PIN HEADER, 1.27x1.27mm PITCH, PCB MOUNT VERTICAL, DUAL ROWS, MACHINE PIN