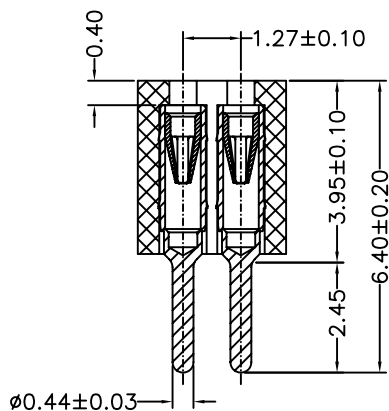
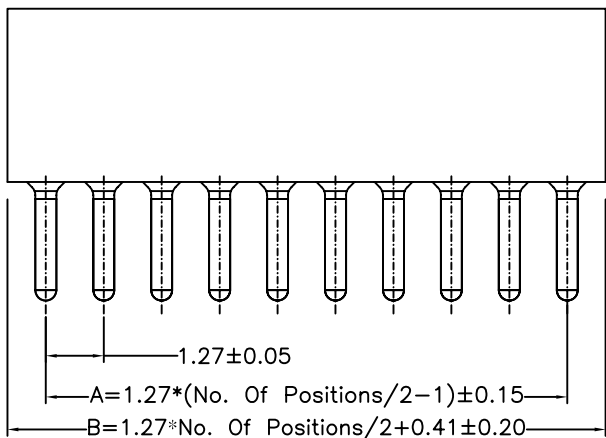
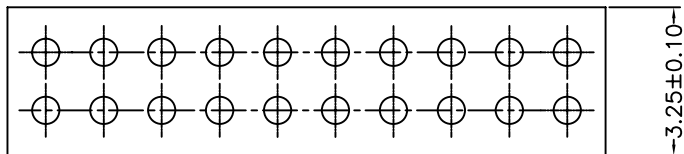


Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:100V AC/DC

Contact Resistance:10m Ohm. Max.

Insulator Resistance:5000M Ohm. Min.

Withstanding Voltage:1000V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Material And Finish:

Insulator:High Temp. Plastic(PPS UL94V-0)


Standard Color:Black

Contact:Beryllium Copper(Becu) Gold Plated

Sleeve Barrel:Copper Alloy Tin Plated

Dimension:

Pos.	Dimension:		Pos.	Dimension:		Pos.	Dimension:		Pos.	Dimension:		Pos.	Dimension:	
	A	B		A	B		A	B		A	B		A	B
04	1.27	2.95	20	11.43	13.11	36	21.59	23.27	52	31.75	33.43	68	41.91	43.59
06	2.54	4.22	22	12.70	14.38	38	22.86	24.54	54	33.02	34.70	70	43.18	44.86
08	3.81	5.49	24	13.97	15.65	40	24.13	25.81	56	34.29	35.97	72	44.45	46.13
10	5.08	6.76	26	15.24	16.92	42	25.40	27.08	58	35.56	37.24	74	45.72	47.40
12	6.35	8.03	28	16.51	18.19	44	26.67	28.35	60	36.83	38.51	76	46.99	48.67
14	7.62	9.30	30	17.78	19.46	46	27.94	29.62	62	38.10	39.78	78	48.26	49.94
16	8.89	10.57	32	19.05	20.73	48	29.21	30.89	64	39.37	41.05	80	49.53	51.21
18	10.16	11.84	34	20.32	22.00	50	30.48	32.16	66	40.64	42.32			

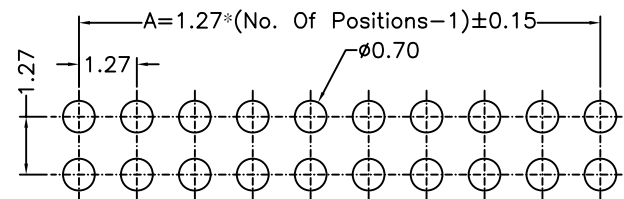

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HASS-D-2Xxx-LF

SERIES

LEADFREE

2X02:04 WAY

2X40:80 WAY

DIP 180°

DESCRIPTION:1.27mm Double row PCB Socket Straight Type