

SPECIFICATION

Current Rate:1 AMP

Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$.

Contact Resistance: $\leq 10\text{m}\Omega/\text{Contact}$



Dielectric voltage:1000V AC for one minute

Operation Temperature: -40°C to $+105^{\circ}\text{C}$


MATERIAL

Insulator:PPS(UL94V-0)

Contact Pin:Copper Alloy

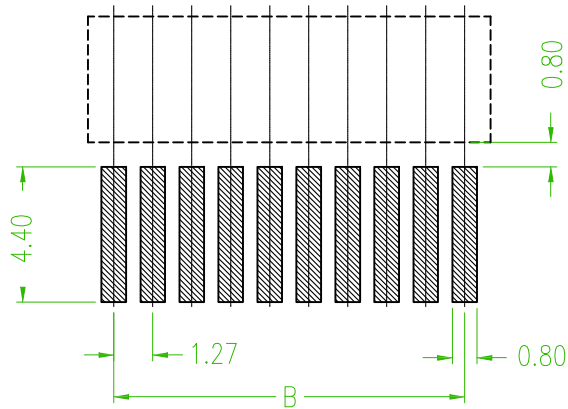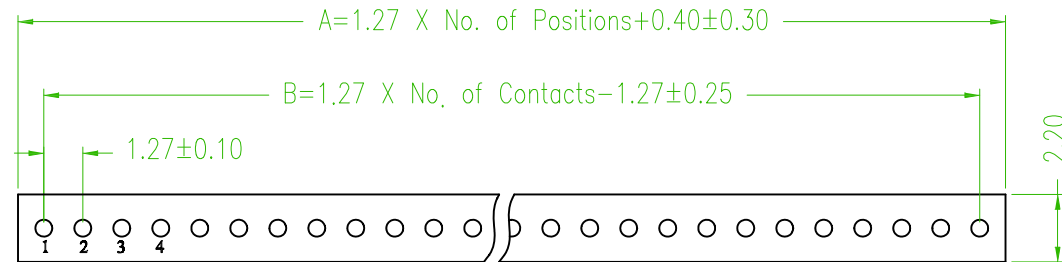

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

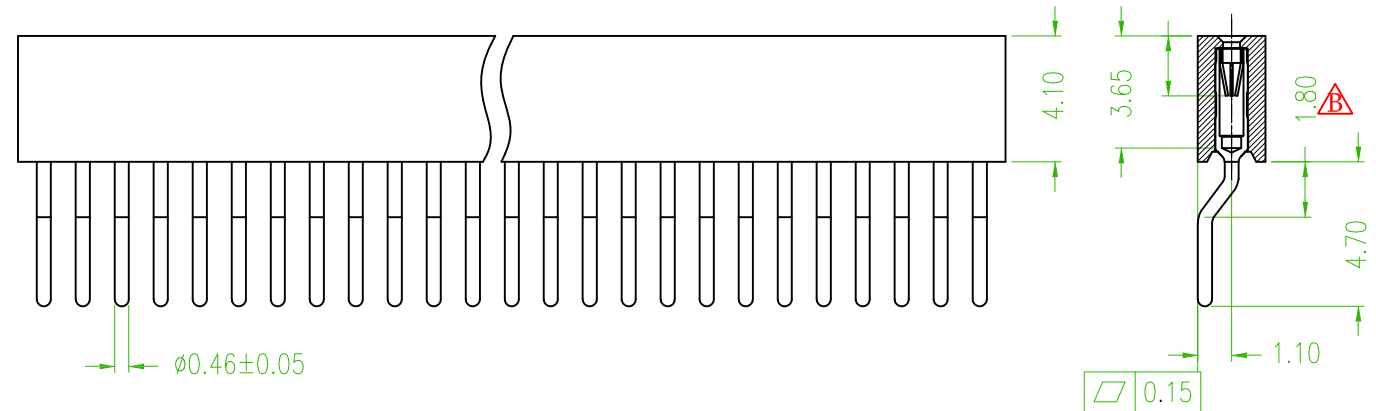

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.20
.XX ± 0.15
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HASS-WX-1Xxx-LF

SERIES | LEADFREE
1X02:02WAY
1X50:50WAY
NON POST
90°SMT

DESCRIPTION: MACHINE PIN SOCKET 1.27mm