

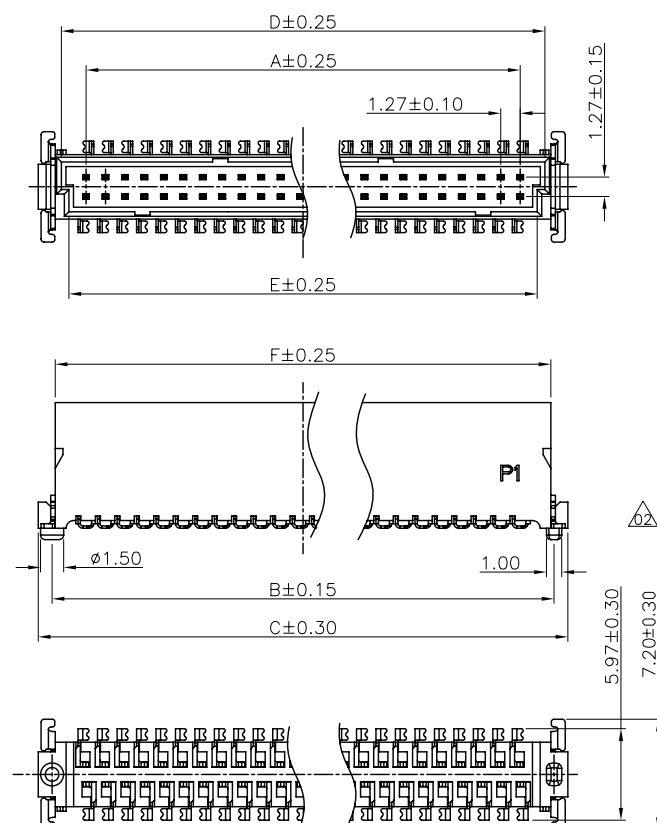


Specifications
 Current Rating:0.8Amp
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:30mΩ Max.
 Operating Temperature:-55°C to +125°C
 Materials
 Contact Material: Phosphor Bronze Δ
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 Colour:Black

PIN NO.	A	B	C	D	E	F
2*06	6.35	10.77	12.70	9.57	8.57	10.35
2*13	15.24	19.66	21.60	18.46	17.46	19.24
2*25	30.48	34.90	36.80	33.70	32.70	34.48
2*34	41.91	46.33	48.20	45.13	44.13	45.91
2*40	49.53	53.95	55.80	52.75	51.75	53.53

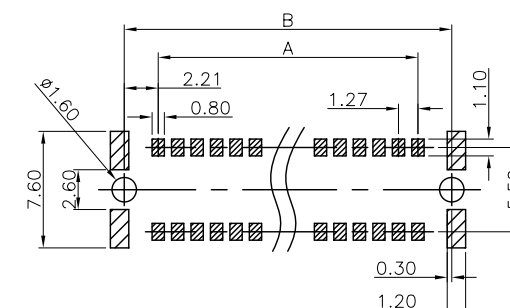

Pin No.	Dim.H	Δ
≤ 25pin	0.12	
> 25pin	0.15	



Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HAUB-PV32P-xxx-LF

SERIES LEADFREE

012~080WAY

MALE UNMATED HIGH 3.2mm

180°SMT

DESCRIPTION: Pitch 1.27 male Connector