

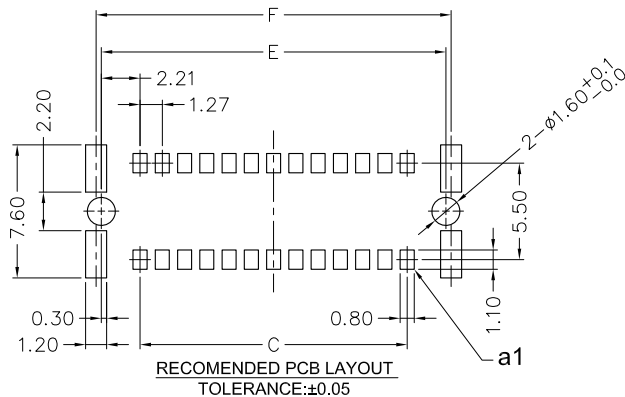
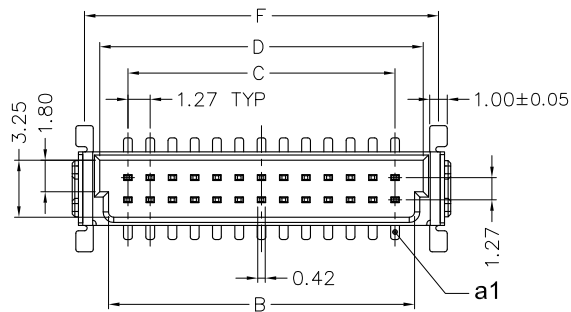
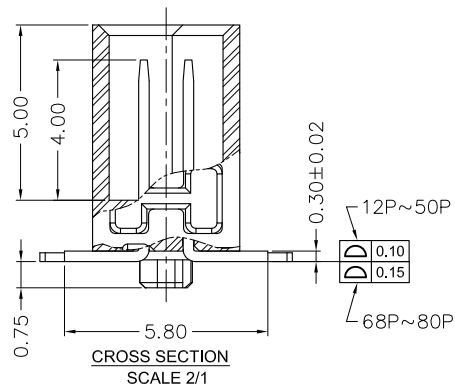
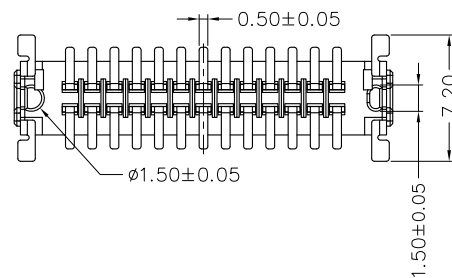




DIM-TABLE

PIN NO.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G
10	11.43	7.30	5.08	8.30	9.50	10.07	9.10
12	12.70	8.57	6.35	9.57	10.77	11.34	10.37
16	15.24	11.11	8.89	12.11	13.31	13.88	12.91
20	17.78	13.65	11.43	14.65	15.85	16.42	15.45
24	20.32	16.19	13.97	17.19	18.39	18.96	17.99
26	21.59	17.46	15.24	18.46	19.66	20.23	19.26
30	24.13	20.00	17.78	21.00	22.20	22.77	21.80
32	25.40	21.27	19.05	22.27	23.47	24.04	23.07
40	30.48	26.35	24.13	27.35	28.55	29.12	28.15
50	36.83	32.70	30.48	33.70	34.90	35.47	34.50
68	48.26	44.13	41.91	45.13	46.33	46.90	45.93
80	55.88	51.75	49.53	52.75	53.95	54.52	53.55

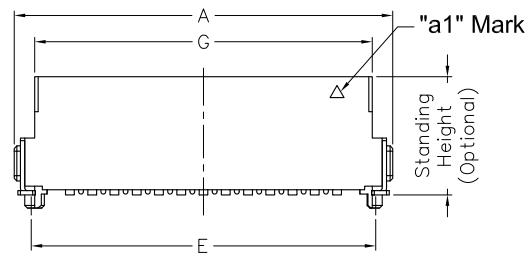

Specification

Insulator Material:	High Temp. Thermoplastic, UL94V-0.
Contact Material:	Phosphor Bronze.
Board Lock Material:	Brass.
Contact Plating:	Au on Contact Area. Sn (100μ" Min.) on Soldertail. Nickel (Contact - 80μ" Min. / Soldertail - 50μ" Min.) Sn(100μ" Min.) over Nickel (40μ" Min.)
Board Lock Plating:	Sn(100μ" Min.) over Nickel (40μ" Min.)
Current Rating:	1.7A Max.
Contact Resistance:	25 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +125°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框


ORDER INFORMATION

HAUB-PVxxP-xxx-LF


SERIES LEADFREE
012~080WAY
POST

MALE 17:UNMATED HIGH 1.70mm
180°SMT 32:UNMATED HIGH 3.25mm
48:UNMATED HIGH 4.80mm


DESCRIPTION:

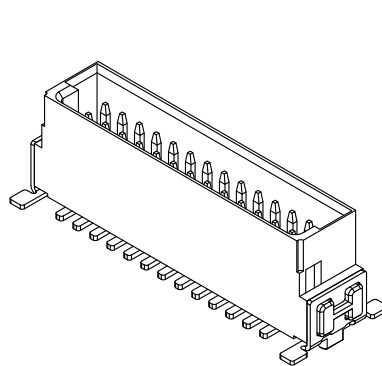

STANDING HEIGHT: A (6.75)
HAUB-PV17P-xxx


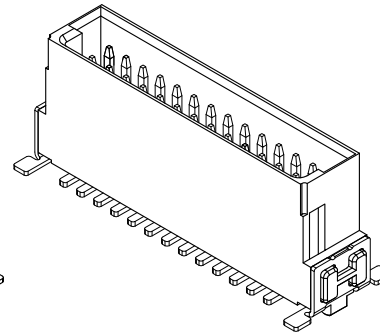


STANDING HEIGHT: B (8.25)
HAUB-PV32P-xxx

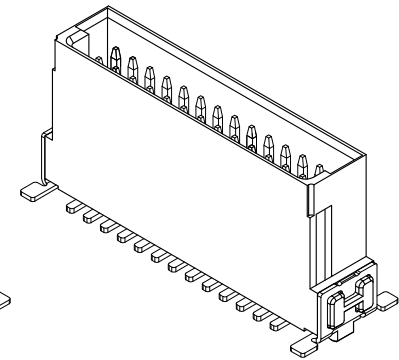


STANDING HEIGHT: C (9.85)
HAUB-PV48P-xxx

< SMC04 Series >



< SMC02 Series >

Matting →



Connector Height		Stacking Height
X	Y	H(Matting)
6.75	6.25	8.0
	9.05	10.8
	13.65	15.4
8.25	6.25	9.5
	9.05	12.3
	13.65	16.9
9.85	6.25	11.1
	9.05	13.9
	13.65	18.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HAUB-PVxxP-xxx-LF

SERIES LEADFREE

012~080WAY

MALE 17:UNMATED HIGH 1.70mm

180°SMT 32:UNMATED HIGH 3.25mm

48:UNMATED HIGH 4.80mm

DESCRIPTION: