
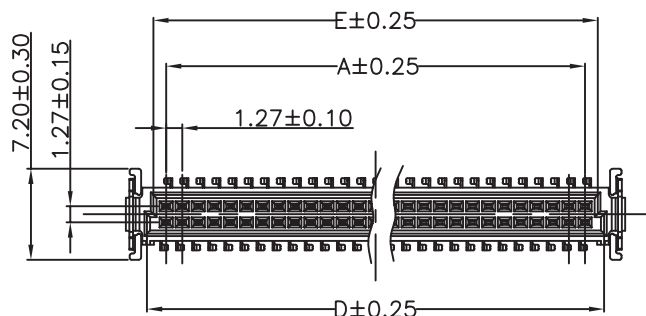


凸點防呆，與標示P1的面相反



## Specifications

Current Rating: 0.8Amp @ 70°C ambient  
for 80PIN

Insulation Resistance: 10000M  $\Omega$  Min.

Dielectric Withstanding Voltage: 500V AC

Contact Resistance: 25m $\Omega$  Max.

Operating Temperature: -55°C to +125°C

## Materials

Contact Material: COPPER ALLOY

Insulator Material: High Temperature Thermoplastic,


△ UL 94V-0 LCP or the equivalent material.

Colour: BLACK

## Recommended P.C.Board

### Layout

(Tolerance: ±0.05)

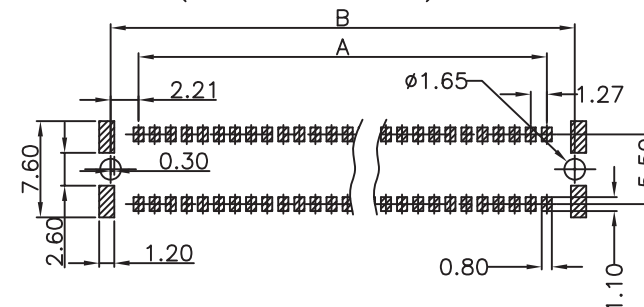

| PIN NO. | A     | B     | C     | D     | E     |
|---------|-------|-------|-------|-------|-------|
| 12      | 6.35  | 10.77 | 12.70 | 9.37  | 8.37  |
| 26      | 15.24 | 19.66 | 21.59 | 18.26 | 17.26 |
| 50      | 30.48 | 34.90 | 36.83 | 33.50 | 32.50 |
| 68      | 41.91 | 46.33 | 48.26 | 44.93 | 43.93 |
| 80      | 49.53 | 53.95 | 55.88 | 52.55 | 51.55 |

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ± 0.30  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±



## ORDER INFORMATION

HAUB-SV62P-xxx-LF



DESCRIPTION: Pitch 1.27 Female Connector  
SMC TYPE-B SMT TYPE HIGH 6.2mm 180°