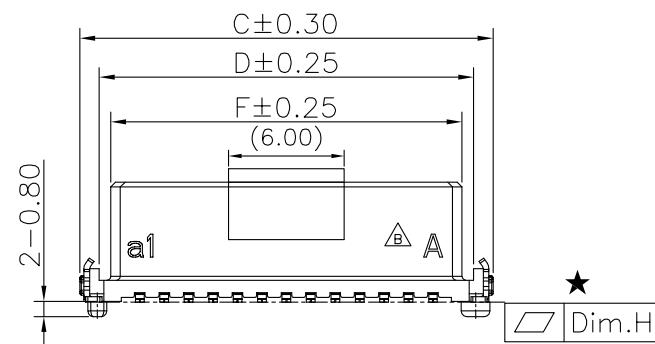
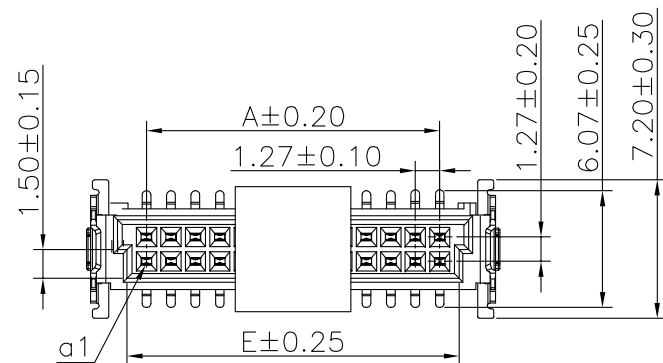


Pin No.	Dim.H
≤25Pin	0.12
>25Pin	0.15

Specifications

Current Rating:1.7Amp/Pin.

Insulation Resistance:10000MΩ Min.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:25mΩ Max.


Operating Temperature:-55°C to +125°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material Colour:Black

No. of PIN	Dimension Information					
	A	B	C	D	E	F
10	5.08	9.50	11.33	9.30	7.10	8.10
12	6.35	10.77	12.60	10.57	8.37	9.37
16	8.89	13.31	15.14	13.11	10.91	11.91
20	11.43	15.85	17.68	15.65	13.45	14.45
26	15.24	19.66	21.49	19.46	17.26	18.26
32	19.05	23.47	25.30	23.27	21.07	22.07
40	24.13	28.55	30.38	28.35	26.15	27.15
50	30.48	34.90	36.73	34.70	32.50	33.50
68	41.91	46.33	48.16	46.13	43.93	44.93
80	49.53	53.95	55.78	53.75	51.55	52.55

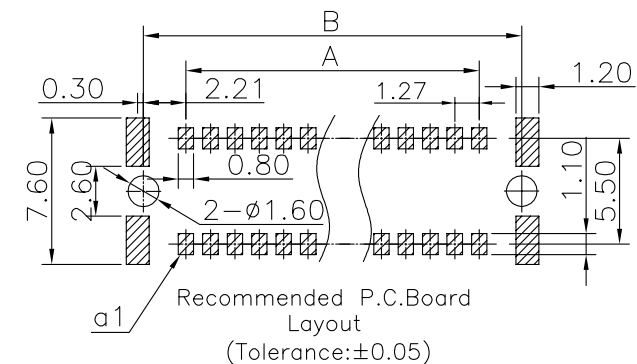

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HAUB-SV62PC-xxx-LF

SERIES LEADFREE

010~080WAY

FEMALE POST HIGH 6.2mm 180°SMT

DESCRIPTION:Pitch1.27 Female Connector SMC Type-B SMT Type High 6.20mm 180°