



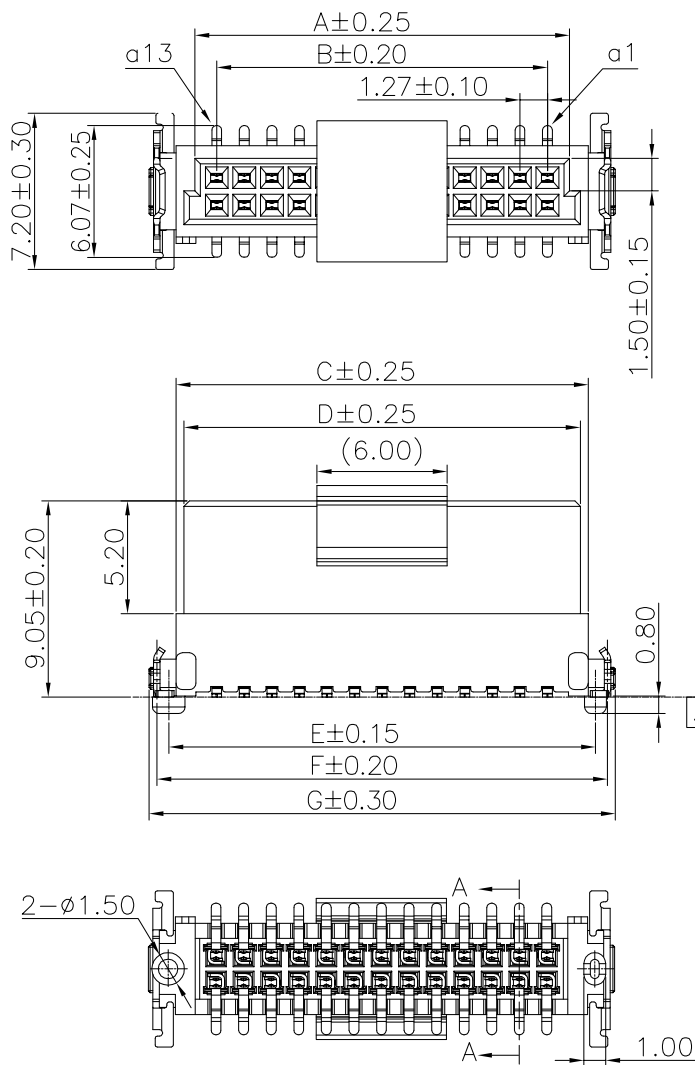

No. of PIN	Dimension Information						
	A	B	C	D	E	F	G
12	8.37	6.35	10.10	9.37	10.77	11.87	12.60
16	10.91	8.89	12.64	11.91	13.31	14.41	15.14
20	13.45	11.43	15.18	14.45	15.85	16.95	17.68
26	17.26	15.24	18.99	18.26	19.66	20.76	21.49
32	21.07	19.05	22.80	22.07	23.47	24.57	25.30
40	26.15	24.13	27.88	27.15	28.55	29.65	30.38
50	32.50	30.48	34.23	33.50	34.90	36.00	36.73
68	43.93	41.91	45.66	44.93	46.33	47.43	48.16
80	51.55	49.53	53.28	52.55	53.95	55.05	55.78

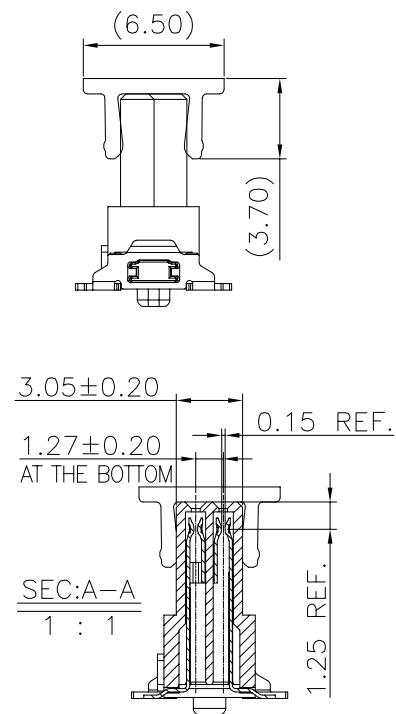

Specifications

Current Rating: 1.70Amp/PIN.

Insulation Resistance: 10000MΩMin.

Dielectric Withstanding Voltage: 500VAC

Contact Resistance: 25mΩMax.

Operating Temperature: -55°C to $+125^{\circ}\text{C}$

Materials

Contact Material: Phosphor Bronze


Insulator Material: High Temperature

Thermoplastic, UL 94V-0 LCP or

the equivalent material

Recommended P.C.Board Layout

(Tolerance: ± 0.05)

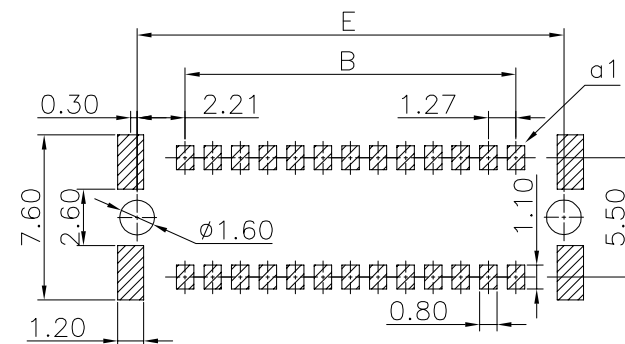

Pin No.	Dim.H
≤ 25 pin	0.12
> 25 pin	0.15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

$X \pm 0.30$

$.X \pm 0.25$

$.XX \pm 0.15$

$.XXX \pm 0.10$

ANG $\pm$

照片框

ORDER INFORMATION

HAUB-SV90PC-xxx-LF

SERIES LEADFREE

012~080WAY

FEMALE CAP POST HIGH 9.05mm 180°SMT

DESCRIPTION: Pitch 1.27 Female Connector SMC Type-B SMT Type High 9.05mm 180°