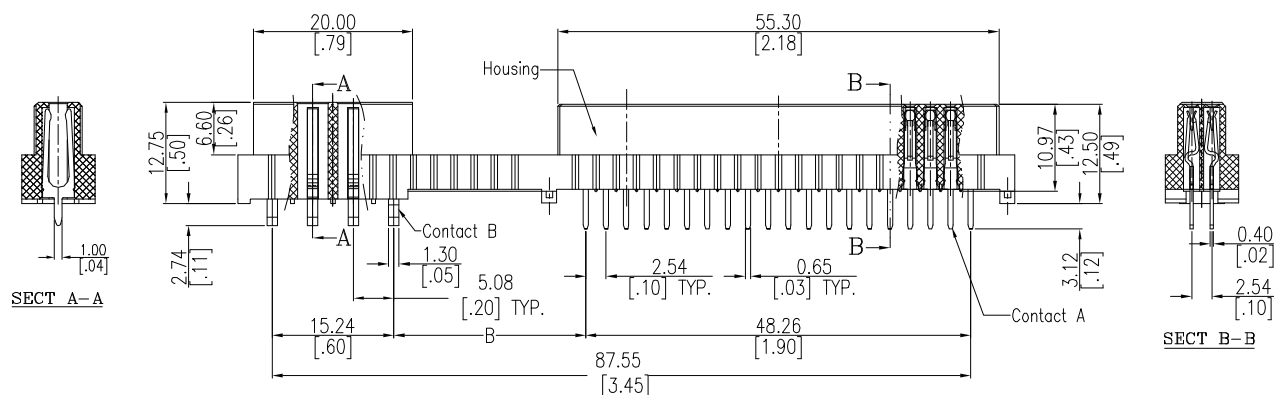
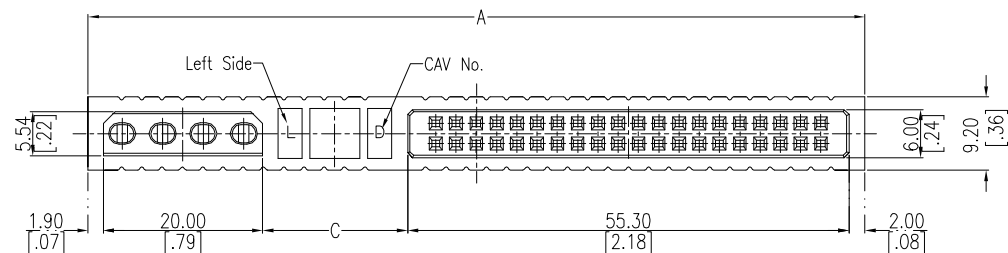


PCB LAYOUT

NOTES:

*Material

Housing: Thermoplastic, UL 94V-0, Color: Black;

Contact A: Brass;

Contacts A Plating: Gold Plate 10u"; On Engagement End, And Tin Plate 150u". On Termination End Over 50u" Nickel .

Contact B: Brass;

Contacts B Plating: Tin Plate 150u". Over 50u" Nickel ;

*Electrical Specification

Contacts Resistance: 20 Milliohm Max. Initial

Insulation Resistance: 1000 Megohm Min.

Withstand Voltage: 1000 VDC

Current Rating: 1 Amperez

Units: mm/Inch

Products No.	Dimensions		
	A	B	C
HC-FD22-0201	95.62/3.764	22.33/0.879	16.45/0.648
HC-FD24-0201	97.35/3.833	24.03/0.946	18.15/0.714
HC-FD27-0201	100.33/3.950	27.03/1.064	21.15/0.833

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X, $\pm$
X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HC-FDxx-0201-LF

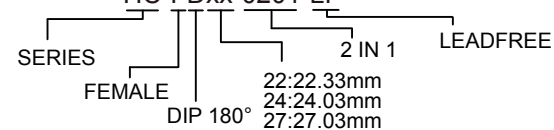

DESCRIPTION: H/D 40P+4P DIP Type (Left 4PIN)