

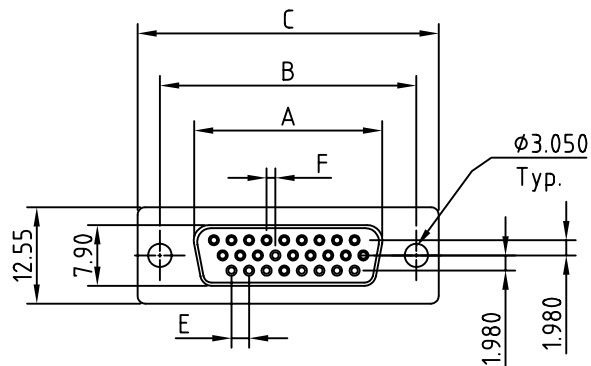


Re Layout P.C.B.
15 POSITION

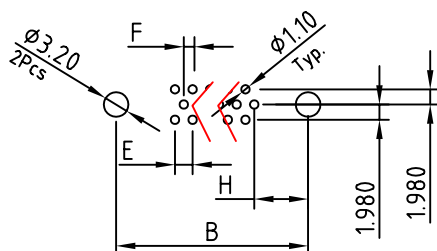

Re Layout P.C.B.
26 /44 /62POSITION

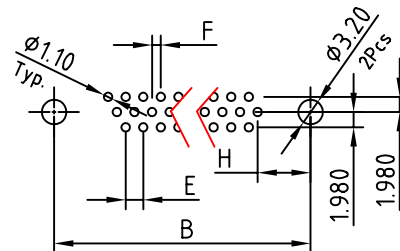

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3Amperes.

Dielectric Withstanding Voltage: AC 500V at sea level.

Insulation Resistance: 1000Megohms Min.

Contact Resistance: 25Milliohms Max.

Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.

Insulator:PBT. (Select PA6T /LCP /PA9T)

Shell: SPCC.

Screw: Copper Alloy.

Note:

No.	A	B	C	D	E	F	H
15	16.33	24.99	30.81	19.23	2.29	1.145	7.04
26	24.66	33.32	39.14	27.56	2.29	1.145	6.88
44	38.38	47.04	53.04	41.28	2.29	1.145	6.88
62	54.84	63.50	69.32	57.33	2.41	1.205	7.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDD-Sxyy-xx-LF
SERIES | 15~62 WAY | LEADFREE
FEMALE | BK:BLACK
| BL:BLUE
| WH:WHITE
| G:GOLD
| S:SEMI GOLD

DESCRIPTION: