


Table 1 Material	
Contact	Brass
Metal Shell	Steel/Dimples on Plug only
Insulator	UL94V-0 Thermoplastic 30% glass filled
Metal Bracket	Steel
Boardlock	Brass
Screw	Brass

Table 2 Finish	
Contact	Gold-flashed
Metal Shell	Tin or nickel plated
Screw	Nickel plated
Metal Bracket	Nickel plated
Boardlock	Nickel plated

Table 3 Electrical Data	
Operating Temperature	-55°C - +125°C
Insulator Resistance	Minimum 5000 MΩ
Contact Resistance	Maximum 10mΩ
Dielectric w/standing Volt	1000 V AC per min

PART NO	A±0.25	B±0.20	C±0.20
HDDL-SGZ95-15	30.81	24.99	16.33
HDDL-SGZ95-26	39.25	33.32	24.66
HDDL-SGZ95-44	53.04	47.04	38.38
HDDL-SGZ95-62	69.50	63.50	54.84

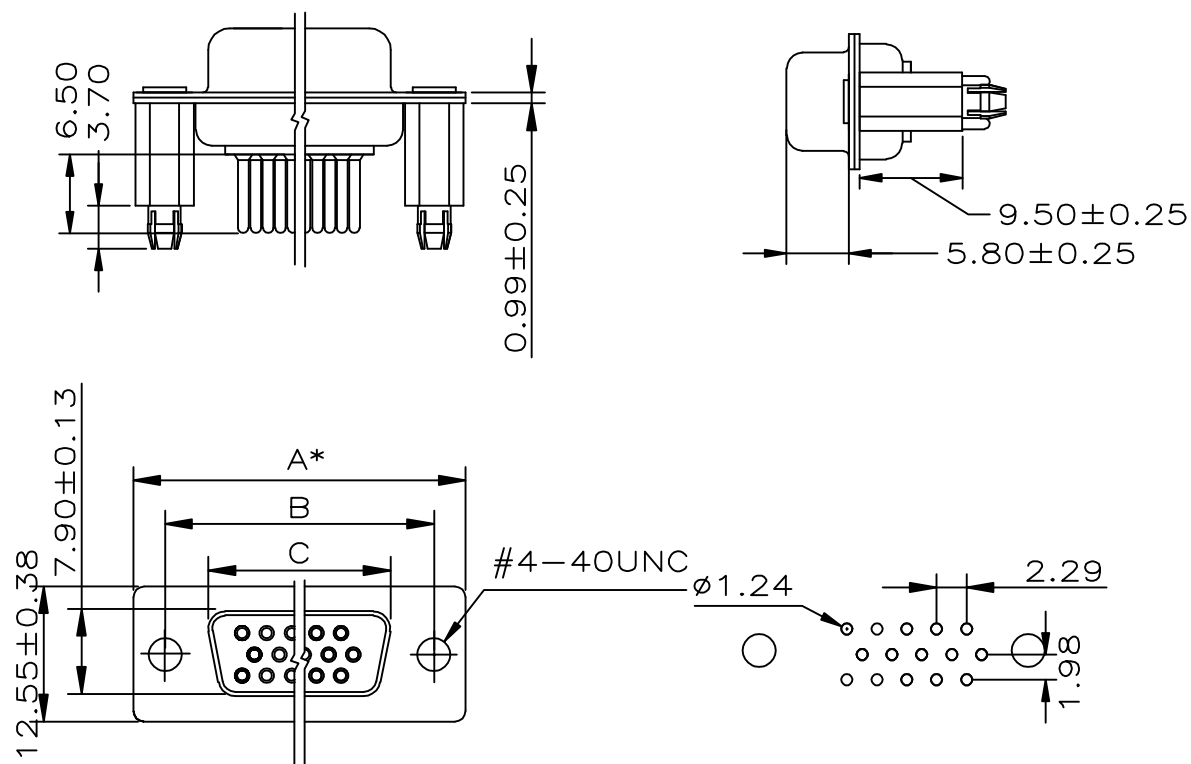

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HDDL-SGZ95-xx-LF
 SERIES | LEADFREE
 15-62 WAY
 CLIP HIGH 9.5mm
 GOLD
 FEMALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

DESCRIPTION: