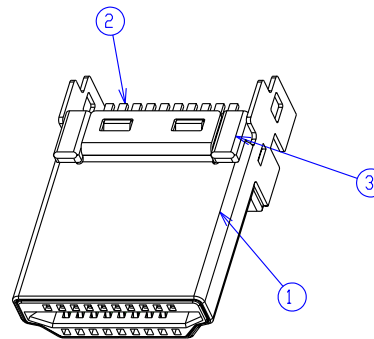
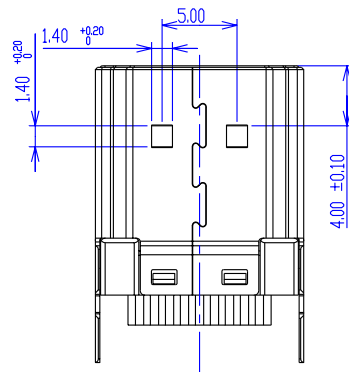
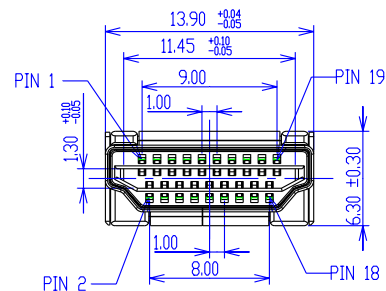
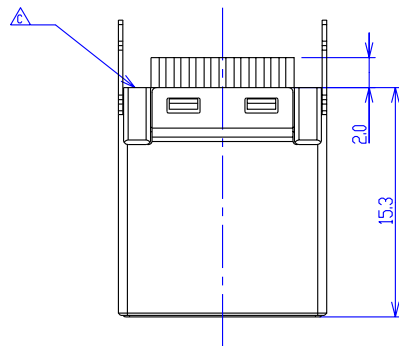


NOTES:

- 1.0 ELECTRICAL CHARACTERISTIC:
- 1.1 CONTACT RESISTANCE:
CONTACT :30mΩ MAX. (INITIAL)
60mΩ MAX. (AFTER)
SHELL: 50mΩ MAX. (INITIAL)
100mΩ MAX. (AFTER)
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
- 1.3 INSULATION RESISTANCE:
UNMATED: 100MΩ MIN.
MATED: 10MΩ MIN.
- 1.4 CURRENT RATING: 0.5A MIN.
- 1.5 VOLTAGE RATING : 40 VAC
- 1.6 IMPEDANCE: 100Ω±15%(DIFFERENTIAL MODE)
AT RISE TIME 200psec(10%~90%)
- 1.7 FAR END CROSS TALK:5% MAX.(PAIR TO PAIR DIFFERENTIAL MODE)
AT RISE TIME 200psec(10%~90%)

3	FRONT SHELL	1	COPPER ALLOY/NICKEL PLATED
2	CONTACT	19	COPPER ALLOY/Au PLATED
1	HOUSING	1	PLASTIC/BLACK
ITEM	NAME	Q'TY	MATERIAL / FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-PSC-19-LF

SERIES
LEADFREE
19 WAY
C TYPE METAL
SOLDER
MALE

DESCRIPTION: HDMI SERIES, PLUG 19POS. SOLDER STAMPING TYPE