



NOTE:

- MECHANICAL :
 - 1.1 INSERTION FORCE :44.1 N MAX
 - 1.2 WITHDRAWAL FORCE :9.8 N MIN.
- ELECTRICAL :
 - 2.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 2.2 VOLTAGE RATING :40V AC (rms)
 - 2.3 WITHSTANDING VOLTAGE: 500 VAC/ 1 MINUTE.
 - 2.4 INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- ENVIRONMENTAL :
 - 3.1 OPERATING TEMPERATURE:-25°C TO +85°C
- MATERIAL :
 - 4.1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 - 4.2 TERMINAL: COPPER ALLOY
 - 4.3 PCB: FR-4
 - 4.4 FRONT SHELL: BRASS OR SPCC
 - 4.5 BACK SHELL: SPCC

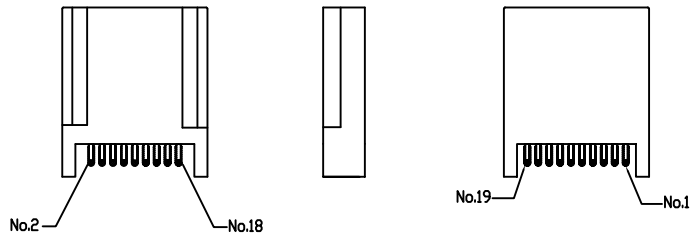

BODY

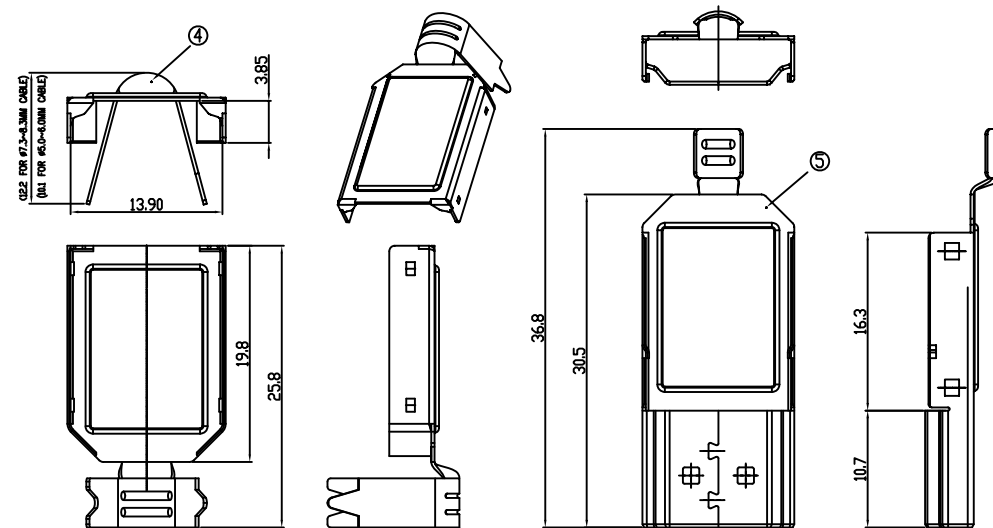

BACK SHELL

FRONT SHELL

ITEM	PART NAME	Q'TY/EA	MATERIALS	NOTE
⑤	FRONT SHELL	1	SPCC OR BRASS	GOLD, OR NICKEL PLATING
④	BACK SHELL	1	SPCC	GOLD, OR NICKEL PLATING
③	CONTACT 2	1	COPPER ALLOY	GOLD PLATED OVER NICKEL
②	CONTACT 1	18	COPPER ALLOY	GOLD PLATED OVER NICKEL
①	HOUSING	1	THERMOPLASTIC	UL94V-0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-PSM-19-LF
SERIES
LEADFREE
19 WAY
METAL
SOLDER
MALE

DESCRIPTION: 三件式不帶板