
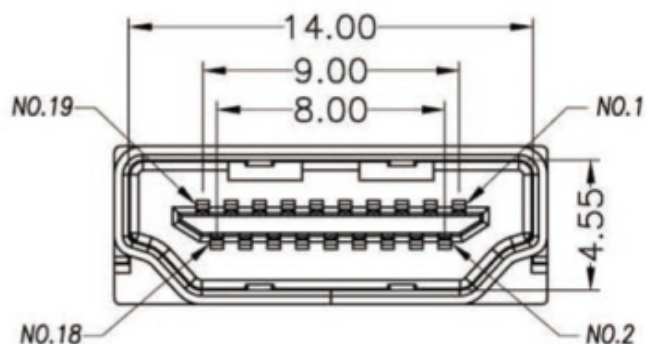
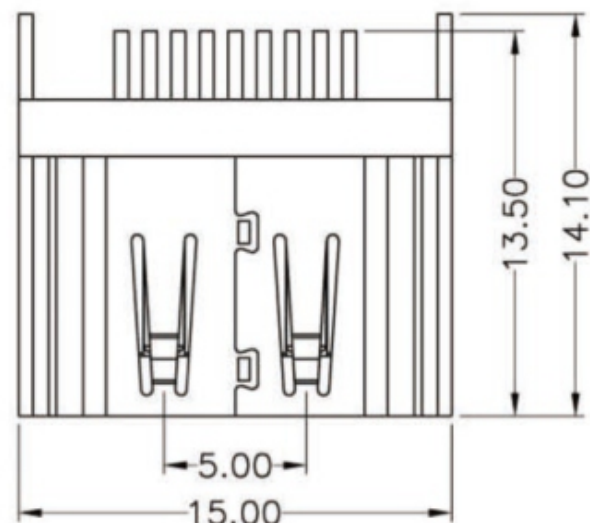
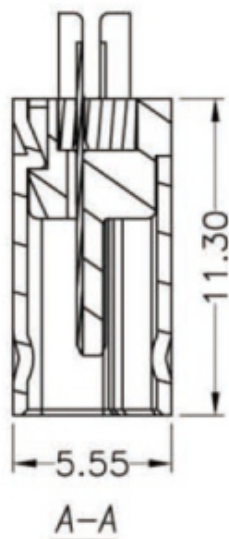


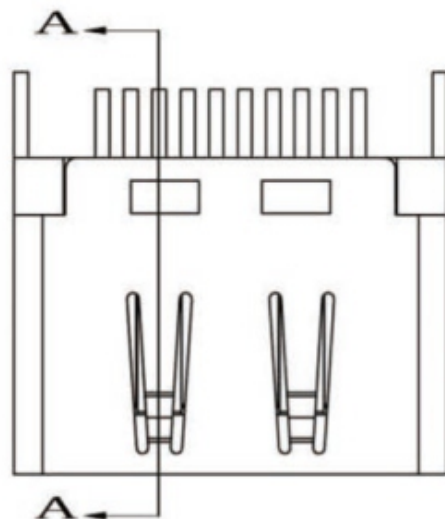

NOTE:

1.MATERIAL:

- a.HOUSING:LCP+30%GF,UL94 V-0 ;
- b.CONTACT:PHOSPHOR BRONZE,T=0.20mm
(SURFACE PLATING:Au15U"+Sn80~100U"+Ni50U")
- c.SHEEL:BRASS,T=0.50mm
(SURFACE PLATING:Nickel or Gold)

2.ELECTRIC:

- a.CONTACT RESISTANCE: 10 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL
- d.OPERATING TEMPERATURE: -20°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SDMB-19-LF

SERIES LEADFREE
19 WAY
PCB
METAL FOOT
DIP 180°
FEMALE

DESCRIPTION: HDMI 19(F) 直立式板端 DIP TYPE