

FEATURES:





- HDMI A Type Female connector for P.C.B SMT
- Fully EMI/RFI shielded

MATERIALS:

- Housing:
Thermoplastic L.C.P UL94V-0 black
- Contacts:
Copper Alloy mating end selective Gold plated
- Shell: Copper Alloy Nickel
plated over copper

ELECTRICAL:

- Current Rating: 0.5 Amp
- Insulation Resistance: 1000m Ω /Min
- Withstanding Voltage: AC 100V/Min
- Contact Resistance: 50m Ω MAX
- Temperature Range: -25°C ~ +85°C

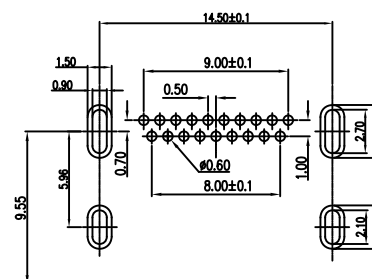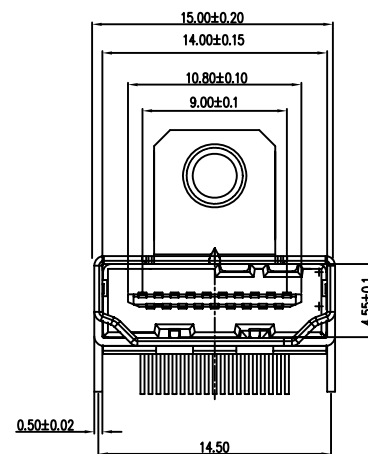

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMI-SR2MN-19-LF
SERIES | | | | LEADFREE
| | | | 19 WAY
| | | | NUT
| | | | METAL FOOT
| | | | DIP 90°
| | | | FEMALE

DESCRIPTION: