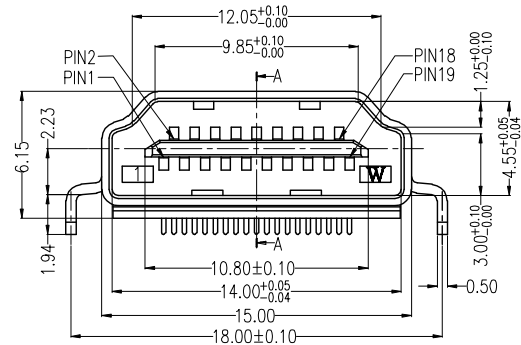


NOTES:

*Material





Housing&Spacer:LCP+50%G.F., UL 94V-0 Rated; Color:Black.
Shield: Brass.
Plating: Nickle(40~80u") Plating .
Contact: Brass.
Plating: Gold Plating Over Nickel(40~80u") on
Contact Area; Tin(100~250u") Plating On
Solder Tail.

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 10 mΩ max.
Insulation Resistance: 100 MΩ min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -25°C to +85°C

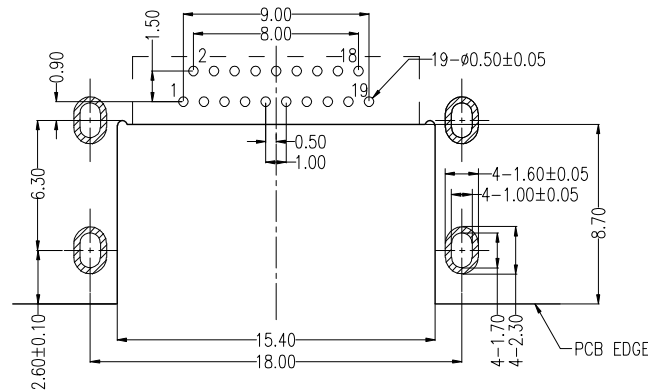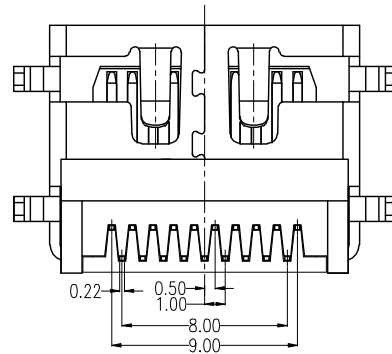

P.C.B LAYOUT(T=1.20mm)
COMPONENT SIDE

Pin No.	Signal Name	Pin No.	Signal Name
1	TMDS Data2+	11	TMDS Clock Shield
2	TMDS Data2 Shield	12	TMDS Clock-
3	TMDS Data2-	13	CEC
4	TMDS Data1+	14	Reserved (in cable but N.C. on device)
5	TMDS Data1 Shield	15	SCL
6	TMDS Data1-	16	SDA
7	TMDS Data0+	17	DDC/CEC Ground
8	TMDS Data0 Shield	18	+5V Power
9	TMDS Data0-	19	Hot Plug Detect
10	TMDS Clock+		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SR2RVM18-19-LF

SERIES
FEMALE
LEADFREE
19 WAY
METAL FOOT 18.0mm
REVERSE
METAL FOOT
DIP 90°

DESCRIPTION: HDMI 19PIN Reverse Double Rows DIP (Subside)