

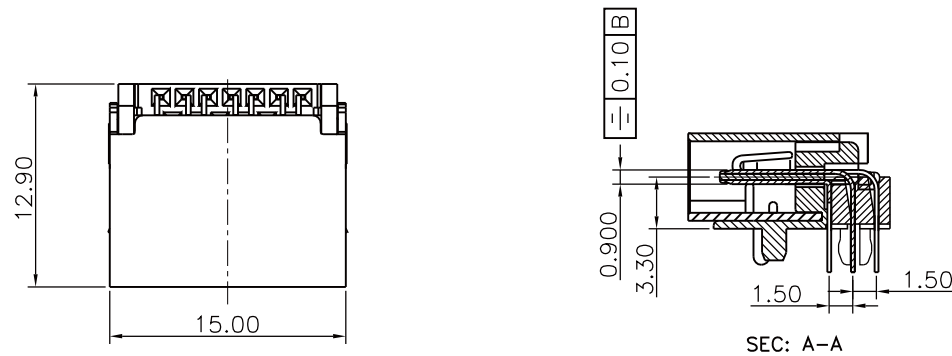
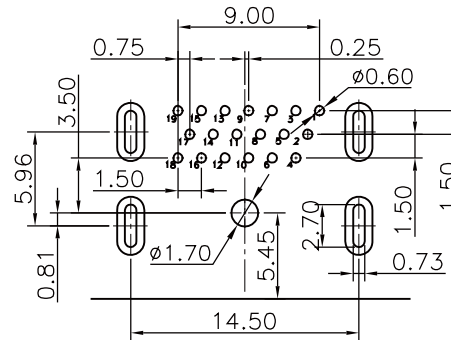




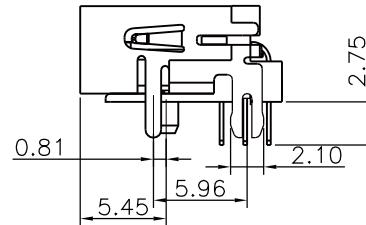

NOTES:
 SPECIFICATION:
 CONTACT CURRENT RATING: 0.5 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 300V R.M.S.
 INSULATION RESISTANCE: 100MΩ MIN.
 CONTACT RESISTANCE: 30 mΩ MAX.
 ENVIRONMENTAL:
 OPERATING TEMPERATURE: -20°C~+85°C.
 MATERIAL:
 INSULATOR: HI-TEMP PLASTIC UL 94V-0.
 CONTACT: COPPER ALLOY T=0.25mm.
 SHELL: COPPER ALLOY T=0.50mm.
 SHRAPNEL: STAINLESS STEEL T=0.20mm

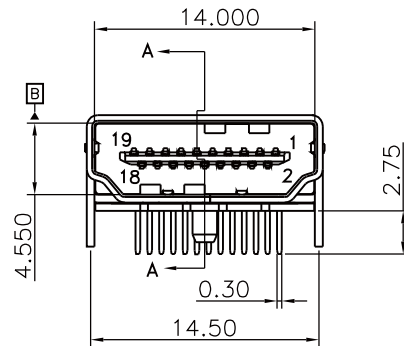

RECOMMENDED P.C BOARD LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

ORDER INFORMATION

HDMI-SR3MMP-19-LF
 SERIES | POST | LEADFREE
 DIP 90° | METAL FOOT
 FEMALE

DESCRIPTION: HDMI 19P FEMALE R/A 三排魚叉腳黑色成品