

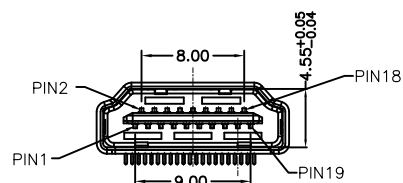
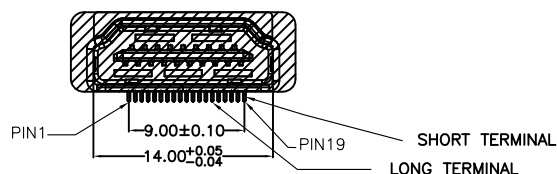

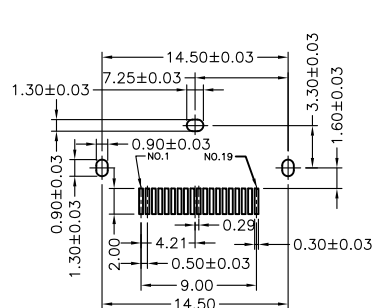


NOTES:

- 1.MATERIAL AND FINISH SEE THE TABLE.
- 2.MECHANICAL CHARACTERISTICS
 - INSERTION FORCE: 44.1N MAX
 - EXTROCTION FORCE: 9.8N MIN, 39.2N MAX
 - MATING CYCLE:10000 CYCLES
- 3.ELECTRICAL CHARACTERISTICS
 - RATING CURRENT: 0.5A
 - RATING VOLTAGE: 40V
 - CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX (EXCLDUING CONDUCTOR RESISTANCE)
 - INSULATION RESISTANCE:
 - a, UNMATED: 100M OHMS MIN AT 500 VDC
 - b, MATED: 10M OHMS MIN AT 150 VDC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
 - OPERATING TEPEPERATURE: -20°C---+85°C
 - STORAGE TEMPERATURE: -20°C---+65°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HDMI-SVM3C-19-LF
 SERIES | | | | LEADFREE
 | | | | 19WAY
 | | | | CAP
 | | | | METAL FOOT
 | | | | 180°SMT
 | | | | FEMALE

DESCRIPTION: HDMI A TYEP 180度SMT=15.0

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ± 2°