

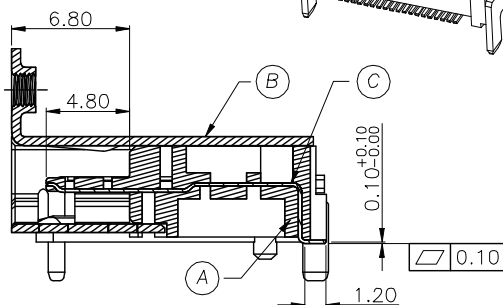
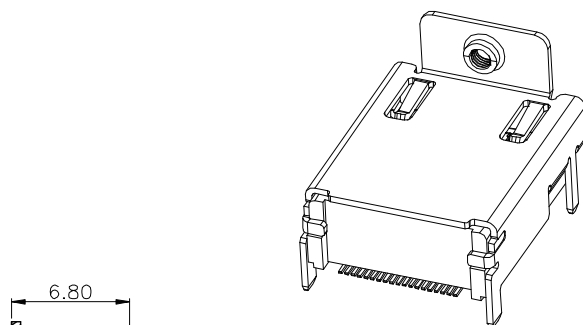
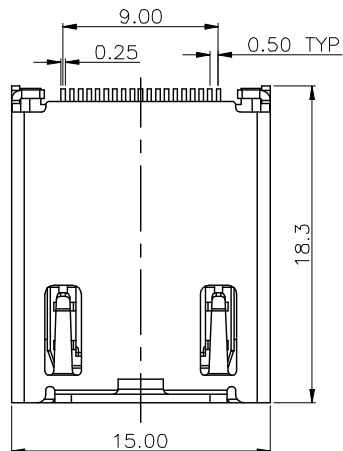


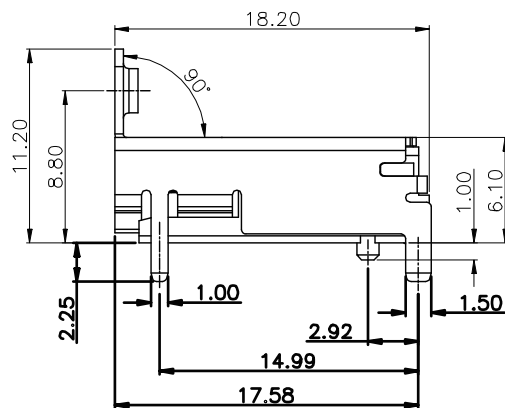

SECTION A-A
SCALE(1:1)

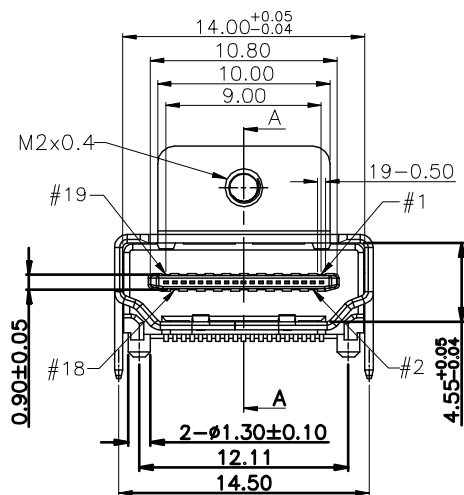

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:


- 1-1. RATING: 40V, 0.5A Min.
- 1-2. CONTACT RESISTANCE: 30 mΩ Max.
- 1-3. INSULATION RESISTANCE: 100 MΩ Min.
- 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 4.5 KGF Max.
- 2-2. WITHDRAWAL FORCE : 1.0~4.0 KGF

3. LIFE TEST: 10,000 CYCLES MIN.

4. PART MUST COMPLY ROHS SPECIFICATION.

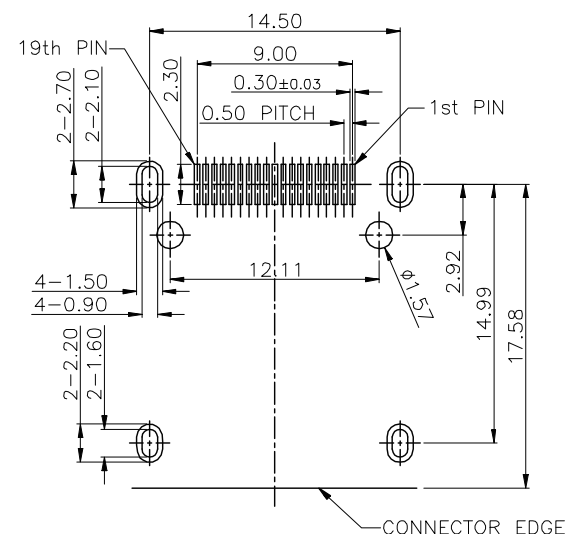

Recommended PCB LAYOUT
(THICKNESS=1.6±0.15mm)(TOLERANCE±0.05mm)

C	19PIN TERMINAL	1	PHOSPHOR BRONZE. T=0.20	Au 1u",MATTE Sn 100u"Min
B	SHELL	1	COPPER ALLOY. T=0.50	Ni PLATING
A	HOUSING	1	High Thermoplastic,UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE


SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.40
.XX ± 0.30
.XXX ± 0.20
ANG ± 5°

照片框

ORDER INFORMATION

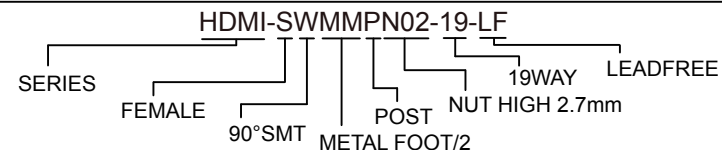

DESCRIPTION: