
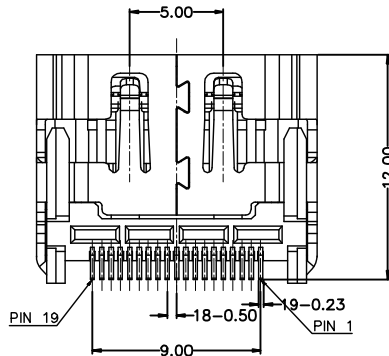
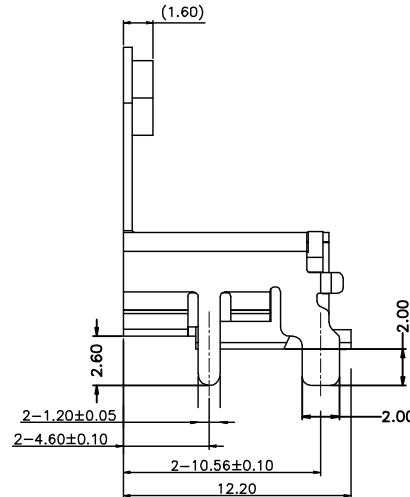
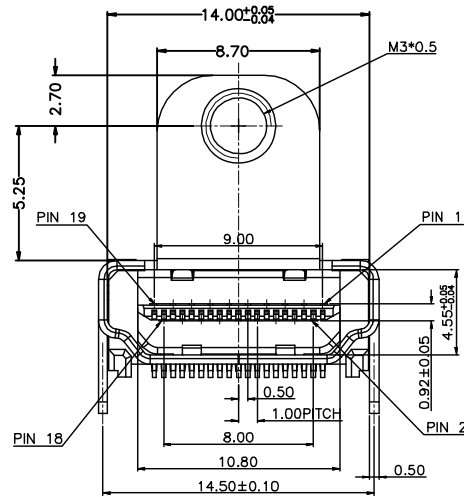
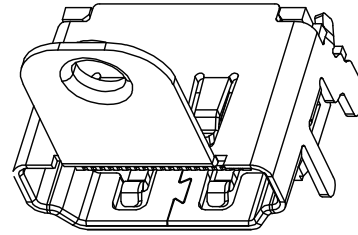




NOTES:

1. MATERIAL:

- 1.1 SHELL: COPPER ALLOY
- 1.2 HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0
- 1.3 COVER: HIGH TEMPERATURE THERMOPLASTIC UL94V-0
- 1.4 TERMINAL: COPPER ALLOY

2. PLATING:

- 2.1 TERMINAL: GOLD PLATED NICKEL ON CONTACT AREA AND TIN ON SOLDER TAILS
- 2.2 SHELL: NICKEL PLATED

3.ELECTRONIC:


- 3.1 CONTACT RESISTANCE: 20mohm MAX
- 3.2 INSULATION RESISTANCE: 1000 Mohm MIN
- 3.3 WITHSTAND VOLTAGE:AC 500V,1min.

4.MECHANICAL:

- 4.1 DURABILITY: 10000 CYCLE.

5.ENVIRONMENT CHARACTERISTICS:

- 5.1 OPERING TEMPERATURE:-55°C TO +105°C

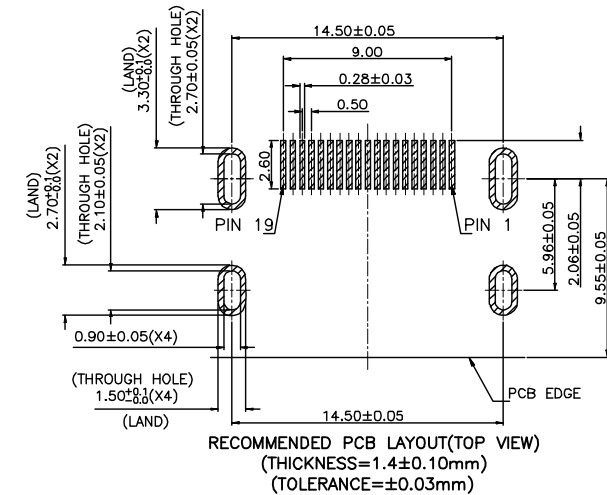

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.38


.XX ± 0.25

.XXX ±

ANG ± 2°

照片框

ORDER INFORMATION

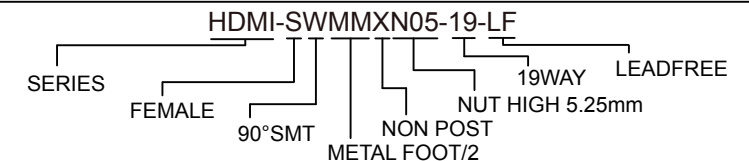

DESCRIPTION: