
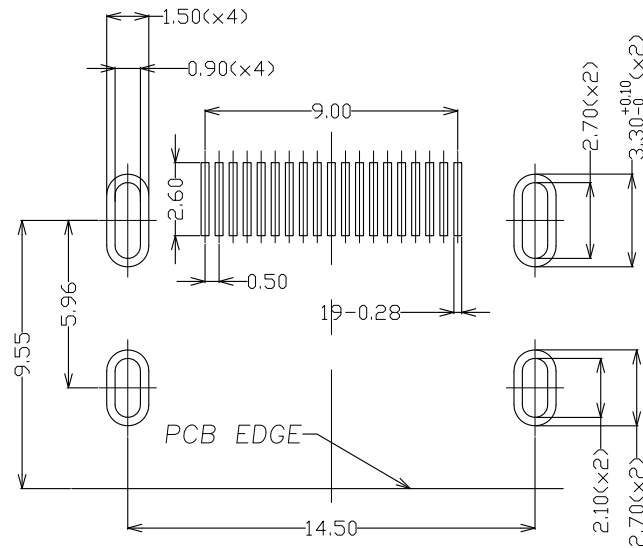


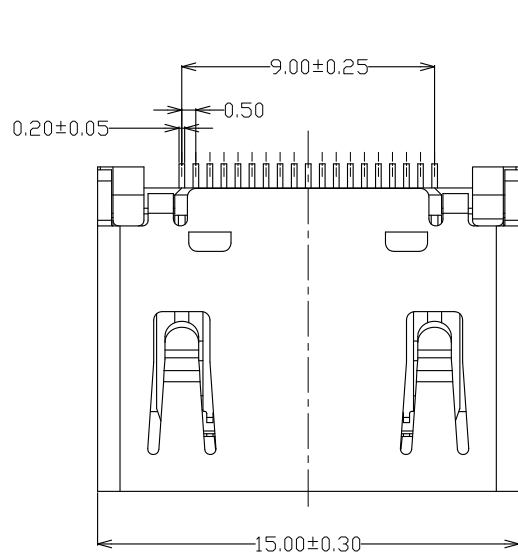

RECOMMENDED P.C.B LAYOUT
(THICKNESS=1.60±0.05mm)

NOTE:

1.MATERIAL:

1.1 Insulator:LCP+30%Glass

Fiber(UL94V-0) BLACK

1.2 Shell And Contact: Brass

1.3 Contact Plating:0.6u"MIN

GOLD PLATING ON CONTACT POINT.

80u"MIN.TIN PLATING ON SOLDER TAILS.

30u"MIN.NICKEL UNDERPLATING OVERALL.

1.4 Shell:50u"Nickel plated over all

2.SPECIFICATION:



2.1 Current Rate:0.5Amp

2.2 insulator Resistance:100MΩ Min

2.3 Dielectric Strength: 500V AC Per minute

2.4 Contact Resistance: 30mΩ Max

2.5 Operation Temperature:-40°C~+85°C

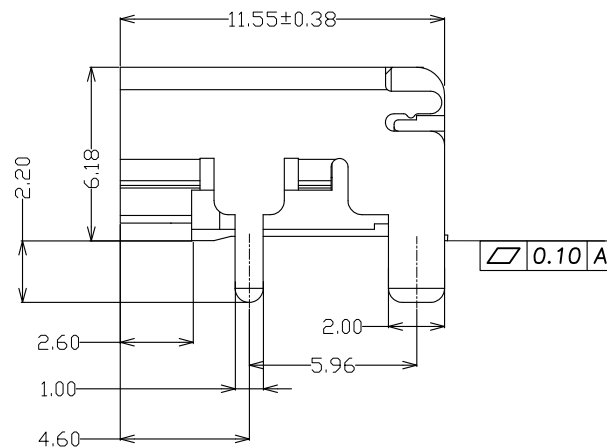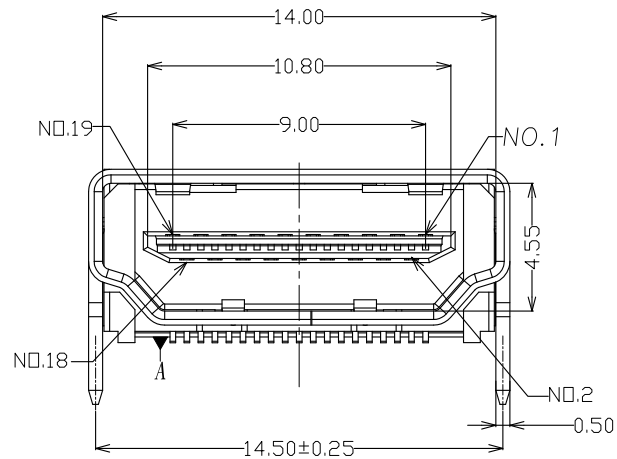

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

ORDER INFORMATION

HDMI-SWMR-19-LF
SERIES REEL LEADFREE
19WAY
METAL FOOT
90° SMT
FEMALE

DESCRIPTION: HDMI 19PIN母SMT 11.55脚仔 2.20mm

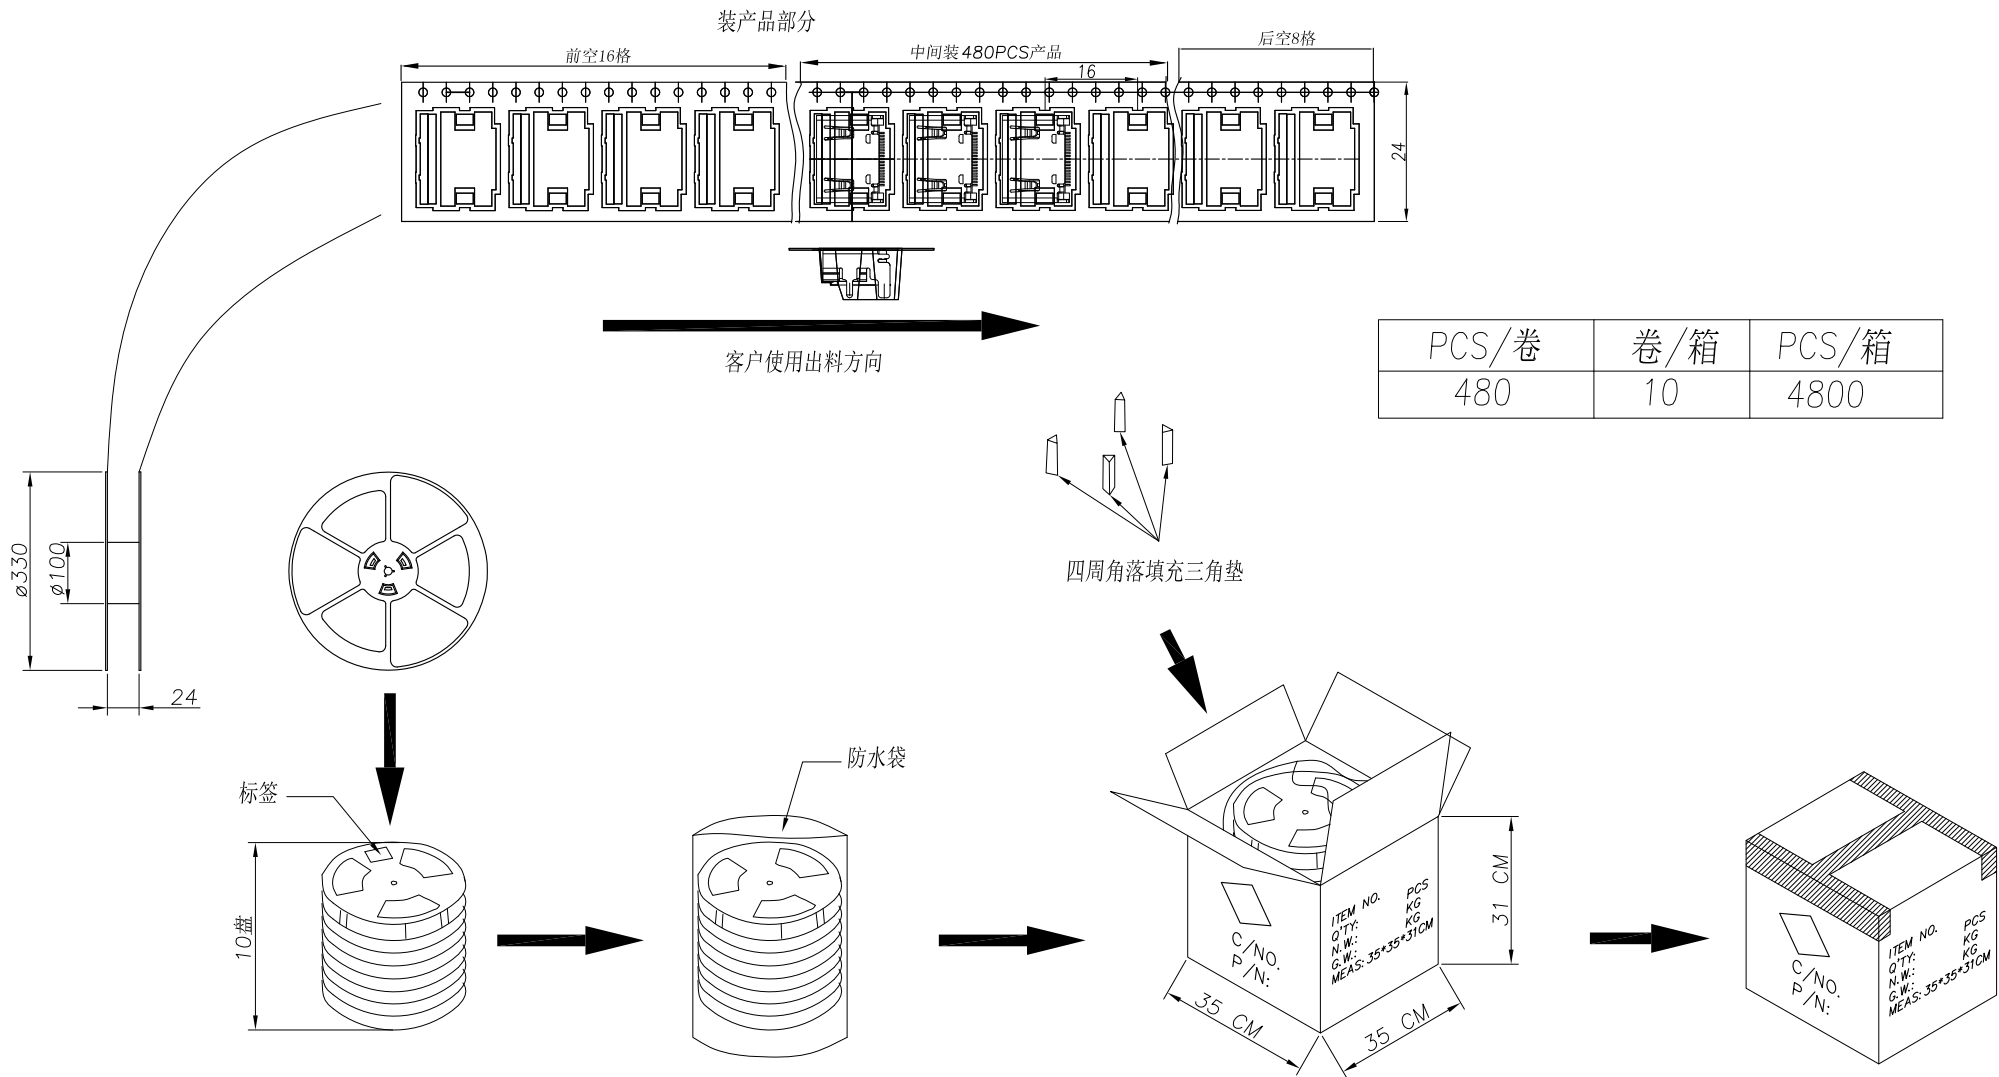

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

HDMI-SWMR-19-LF

SERIES
LEADFREE
19WAY
REEL
METAL FOOT
90° SMT
FEMALE

DESCRIPTION: HDMI 19PIN母SMT 11.55脚仔2.20mm