
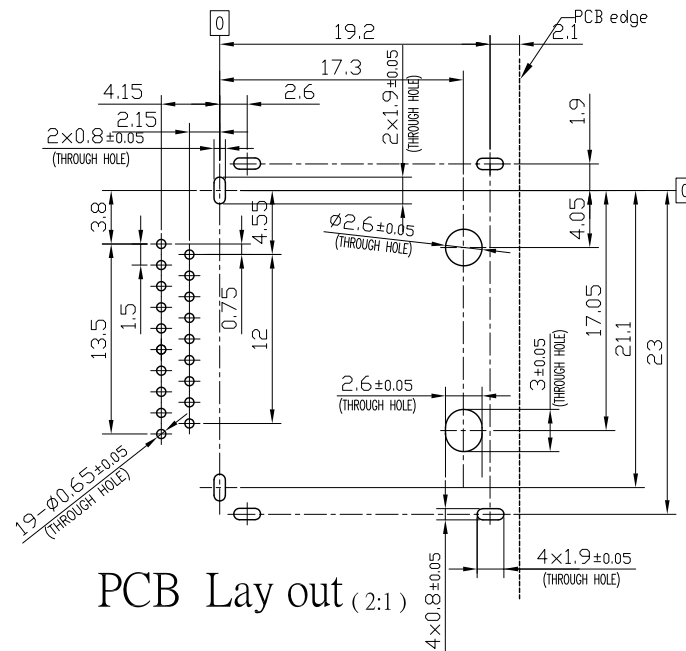
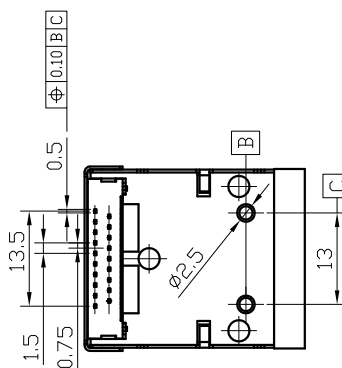
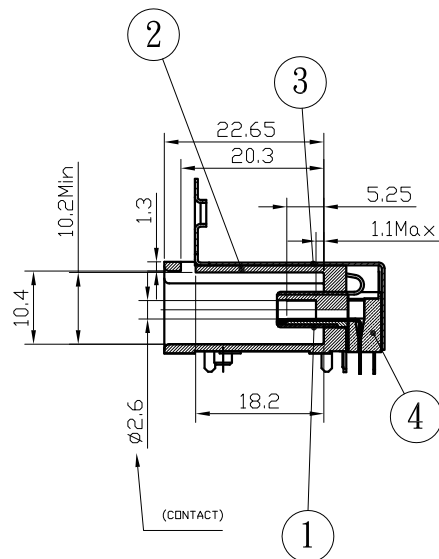
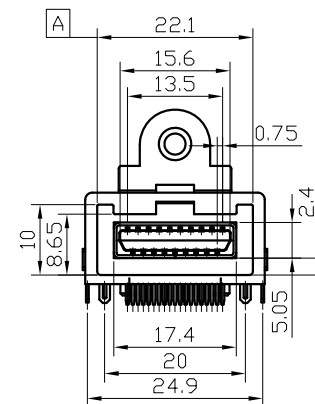
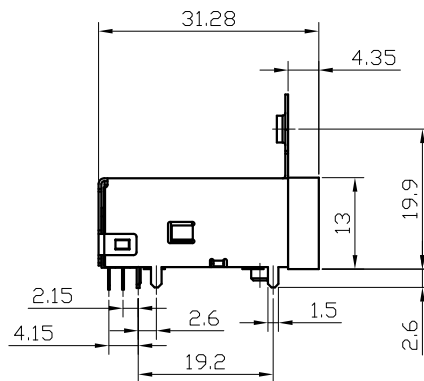




PCB Lay out (2:1)

1	4	REC-REARHOUSING	PBT 30%G.F.
1	3	REC-OUT-SHELL	SPCC
1	2	REC-OUTHOUSING	PBT 30%G.F.
1	1	REC-INNER-SHELL	SPCC
Q'TY	NO.	PART NAME	MATL

Remark :

1.Retension force of the components : 98N min

2.Contact area is 15 μ " gold over Nickle solder area 80~120 μ " Tin over Nickle

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.10
.XX ± 0.08
.XXX ± 0.01
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI15-SRN-19-LF

SERIES

LEADFREE
19WAY
NUT
DIP 90°
FEMALE

DESCRIPTION: HDMI Type E RECEPTACLE