
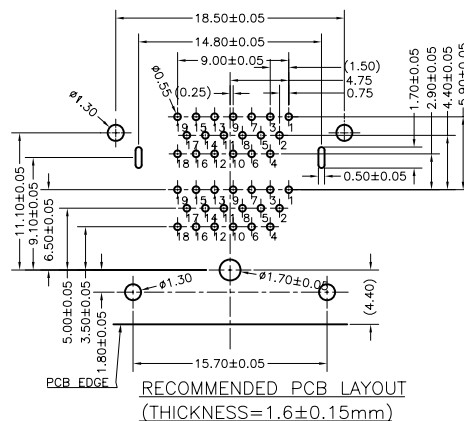
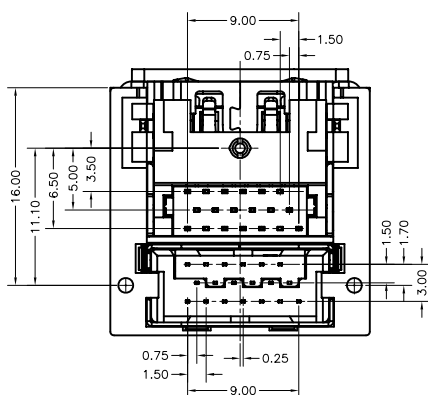

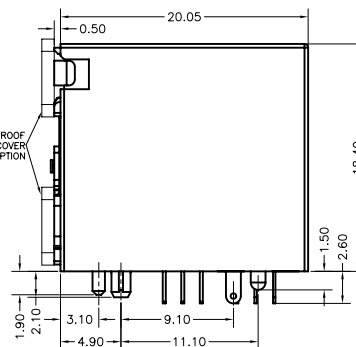
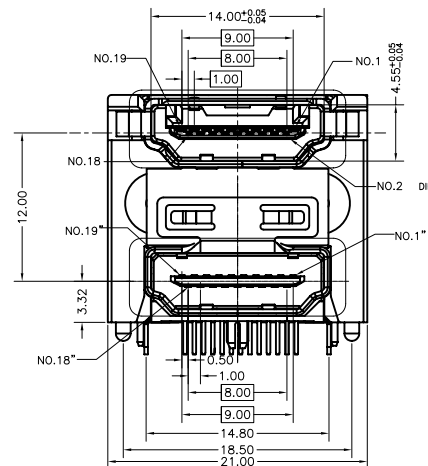


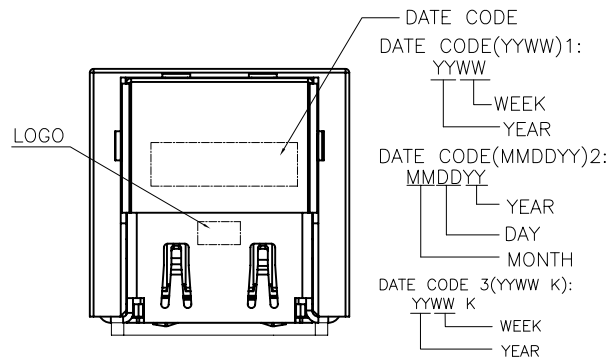

SPECIFICATIONS

SPECIFICATIONS

OPERATING CURRENT: 0.5A MAX.

OPERATION TEMPERATURE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)

300Volts AC BETWEEN ADJACENT TERMINAL(MATE)

INSULATION RESISTANCE:

100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMIB1-FRXM1P5-19-LF

SERIES

POST

METAL

NON SPRING

DIP 90°

LEADFREE

19 WAY

FEMALE

POST

METAL

NON SPRING

DIP 90°

LEADFREE

19 WAY

DESCRIPTION: DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE(無螺絲)