

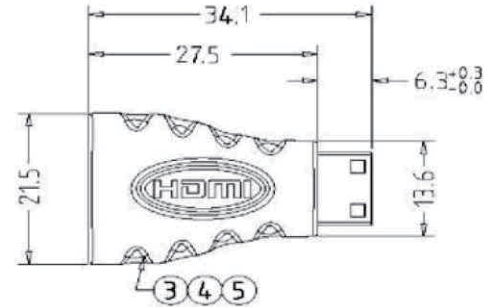


HDMI 19/F





MINI HDMI 19/M



PIN ASSIGNMENT:

HDMI 19/F	MINI HDMI 19/M
3	3 TMDs data2-
1	2 TMDs data2+
2	1 TMDs data2 Shield
6	6 TMDs data1-
4	5 TMDs data1+
5	4 TMDs data1 Shield
9	9 TMDs data0-
7	8 TMDs data0+
8	7 TMDs data0 Shield
12	12 TMDs Clock-
10	11 TMDs Clock+
11	10 TMDs Clock Shield
17	13 DDC/CEC Ground
13	14 CEC
15	15 SCL
16	16 SDA
14	17 Reserved
18	18 +5V Power
19	19 Hot Plug Detect
SHELL	SHELL



MATERIAL:

- 1)CONN:MINI HDMI 19P/M 30U"/AU BLACK SHELL G/F PLATED
SOLDER TYPE with A(M) TO C(F) PCB
- 2)CONN:HDMI 19P/F 30U"/AU BLACK SHELL G/F PLATED
- 3)INNERMOLD:PE LOW DENSITY
- 4)OVERMOLD:PVC 25Pa BLACK UL94V-0
- 5)OVERMOLD:PVC 70Pa BLACK UL94V-0

The product must be in line with RoHS specification

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
3. INSULATION RESISTANCE:10M Ohm(Min)
4. CONDUCTIVE RESISTANCE:2 Ohm(Max)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMIMHDMI-AMBK-1919-LF

SERIES

LEADFREE
19 TO 19 WAY

BLACK
MOLDING
FEMALE TO MALE

DESCRIPTION: