



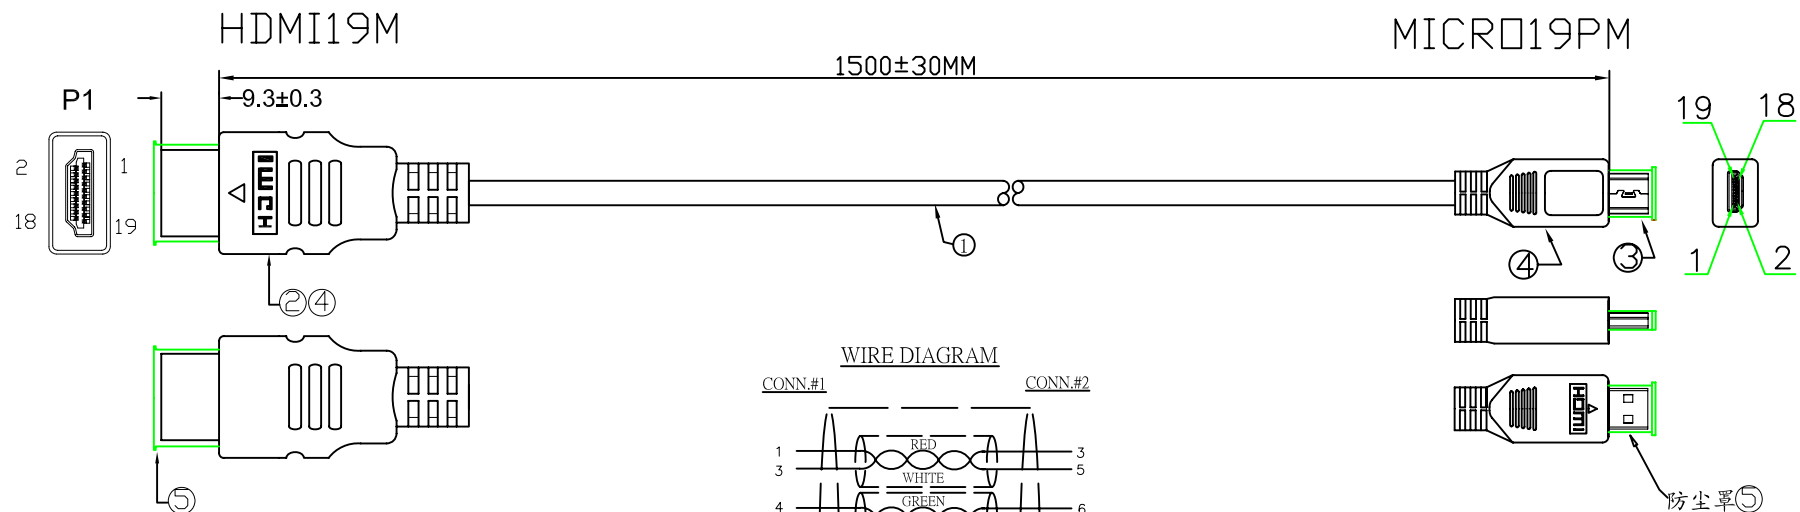


ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: 2Ω/max.
3. Insulation Resistance: 15MΩ/min.
4. Hi-Pot: 150v dc/10ms.

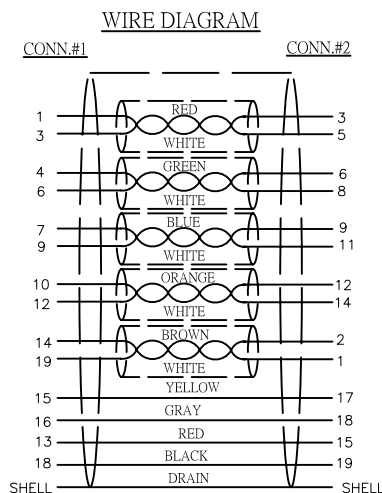

包装：单PCS包装。



PART LIST:ROHS

5	防尘套：透明。	1	PCS
4	胶料：45P黑色PVC胶料。		g/kg
3	HDMI MICRO 插头 19PIN针/外壳镀镍 镀金。	1	SET
2	HDMI 插头 19PIN针/外壳镀镍 镀金。	1	SET
1	HDMI CABLE: (7/0.10BC*1PR+EAM)*5P+7/0.10BC*4C+ADB OD:4.5MM 外被：黑色。	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMIMIHDMI-191930-M1M5-LF

SERIES

LEADFREE

1500mm

MALE TO MALE

30 AWG

19 TO 19 WAY

DESCRIPTION: HDMI19P公 TO Micro HDMI19P公 CABLE L=1500MM