


PIN ASSIGNMENT:

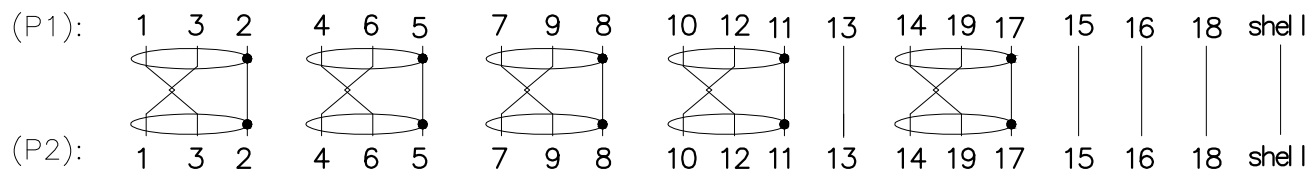

⑥	護套	PE透明	2
⑤	外模	PVC黑色膠料 45P	2
④	內模	PE透明無毒料	2
③	屏蔽殼	HDMI上下馬口鐵	2
②	接頭	HDMI AM 端子PIN金G/F 殼鍍鎳+支架	2
①	線材	UL20276 HDMI CABLE 28AWG:OD7.3 黑色PVC 外被 [(1/0.32CCS*1P+1/0.32CCS*AL/MY)*5+1/0.32CCS*4C+AL+1/0.32CCS+16/8/0.12AL]*1C	1
NO	品名	规格	QT'Y

NOTES:

- 1.100% OPEN OR SHORT TEST
- 2.VOLTAGE:300V DC/10s
- 3.INSULATION RESISTANCE:5M ohm MIN
- 4.CONTACT RESISTANCE:5 ohm MAX
5. The product is ROHS compliant.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

HDMIX2-191928-M2M1-LF

SERIES

LEADFREE
2100mm
MALE TO MALE
28 AWG
19 TO 19 WAY

DESCRIPTION: