


规格:

1. 耐电压: 300V AC MIN
2. 接触阻抗: 5mΩ MAX
3. 绝缘电阻: 10MΩ MIN
4. 所用材质须符合RoHS要求

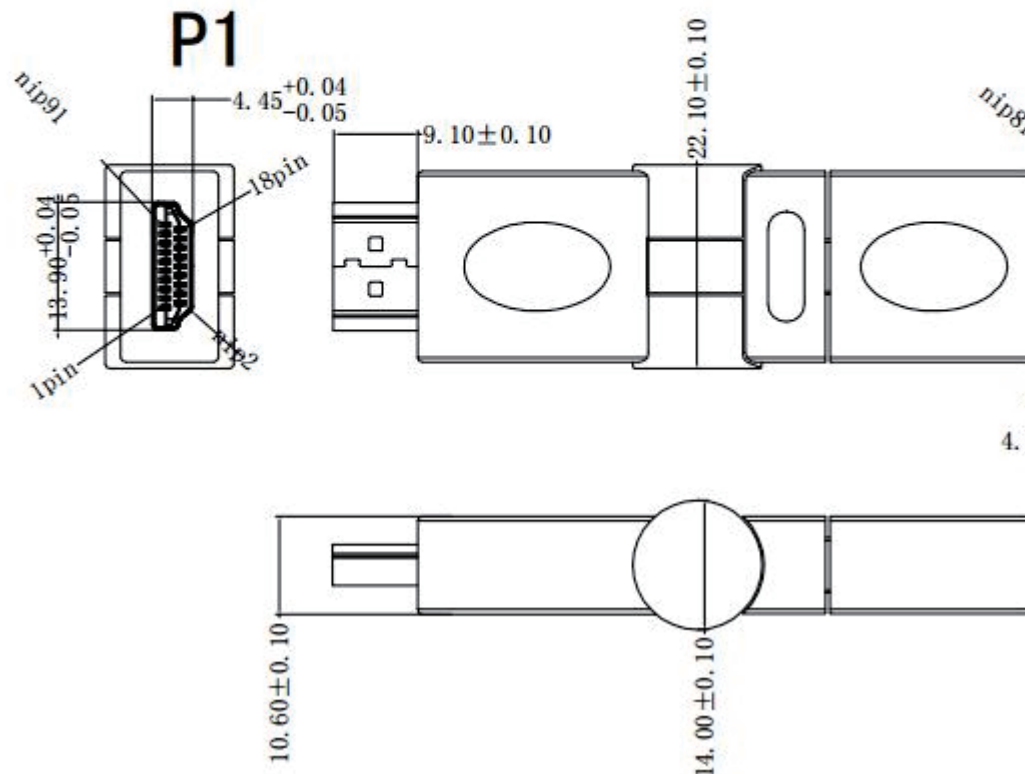

P2

接线图

P1	P2	P1	P2
1	1	11	11
2	2	12	12
3	3	13	13
4	4	14	14
5	5	15	15
6	6	16	16
7	7	17	17
8	8	18	18
9	9	19	19
10	10	SHELL	SHELL

P1:HDMI A male

P2:HDMI A female

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.30

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDMIX2-EMRT-1919-LF

SERIES

LEADFREE

19 PIN TO 19 PIN

ROTARY

MOLDING

MALE TO FEMALE

DESCRIPTION: