


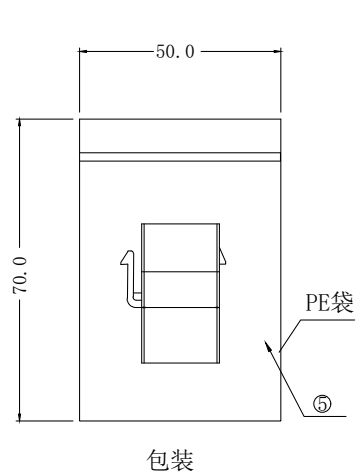


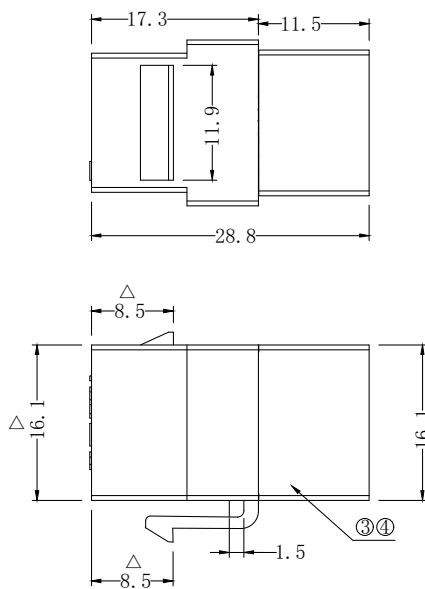

CN1



CN2



接点表

CN1	CN2
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
SHELL	SHELL

注:

1. 100%短/断路&错线测试条件;
2. 导通阻抗 $\leq 5\Omega$, 绝缘阻抗 $\geq 10M\Omega$. 高压测试, DC 300V/10mS.
3. 产品采用PCB板连接, 符合1.4版技术规范.
4. 标有△为重要量测尺寸.
5. 包装方式: 夹链PE袋包装, 1PE袋装1PCS.

5	包装	PE袋 L:70MM W:50MM 透明	PCS	1
4	外壳	ABS胶壳(内扣式)白色	SET	1
3	内连接	PCB板 T=1.6MM	PCS	1
2	连接器	HDMI 19P AF 铁壳镀金 PIN针镀金	PCS	1
1	连接器	HDMI 19P AF 铁壳镀金 PIN针镀金;	PCS	1
序号 NO.	物料名称 Material Name	品名规格 Name and specification	单位 Unit	用量 Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDMIX2-FSPK-1919-LF

SERIES

LEADFREE
19 TO 19 WAY
KEYSTONE
PANEL
FEMALE TO FEMALE 180°

DESCRIPTION: DMI AF TO AF 面板式转接头 白色