

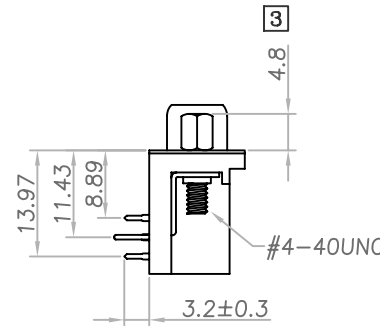
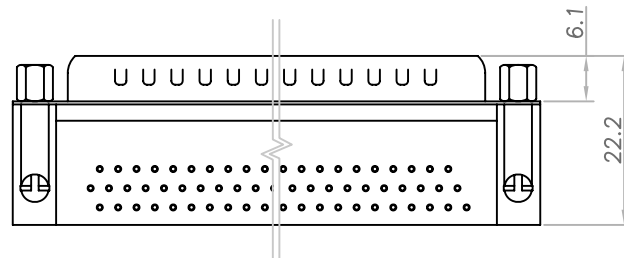


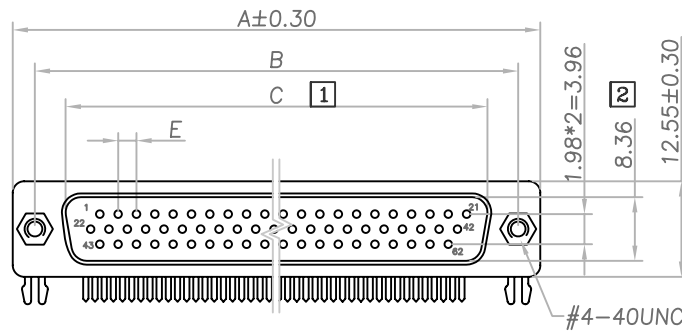

Dimensions						
Positions	A	B	C	E	G	H
15	30.81	24.99	16.92	2.29	1.145	7.04
26	39.20	33.30	25.25	2.29	1.145	6.88
44	53.05	47.04	38.96	2.29	1.145	6.88
62	69.40	63.50	55.42	2.41	1.205	7.00

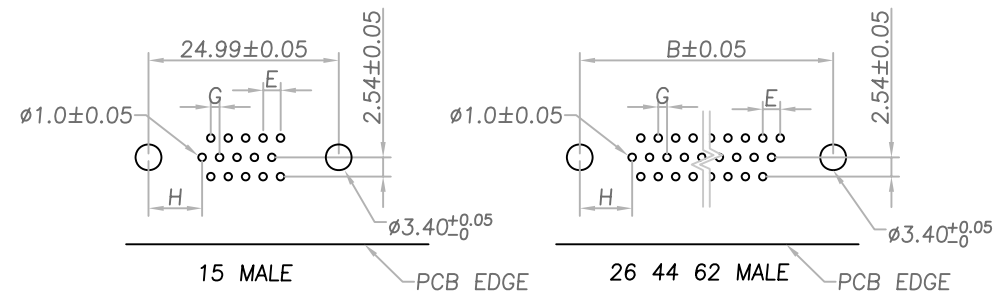

RECOMMENDED PCB LAYOUT

Material & Finish

SHELL:

Steel, Nickel Plated

PIN CONTACT:

Brass, Gold Flash Plated

INSULATOR:

PBT & Glass-fibre reinforced

UL-94-V0 Black

BOARDLOCK:

Steel, Tin Plated

HEX SCREW:

Steel, Nickel Plated

CURRENT RATING:

3 Amp

CONTACT RESISTANCE:

20mΩ

DIELECTRIC STRENGTH:

1000VAC for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500VDC)

TEMPERATURE:

-55°C to +105°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

ANG ± 3°

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HDR-PS-xx-LF

SERIES

LEADFREE

15~62 WAY

SEMI GOLD

MALE

DESCRIPTION: D-SUB HIGH DENSITY PCB R/A TYPE MALE LOCK 4.8 HEX SCREW (15~62)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com