


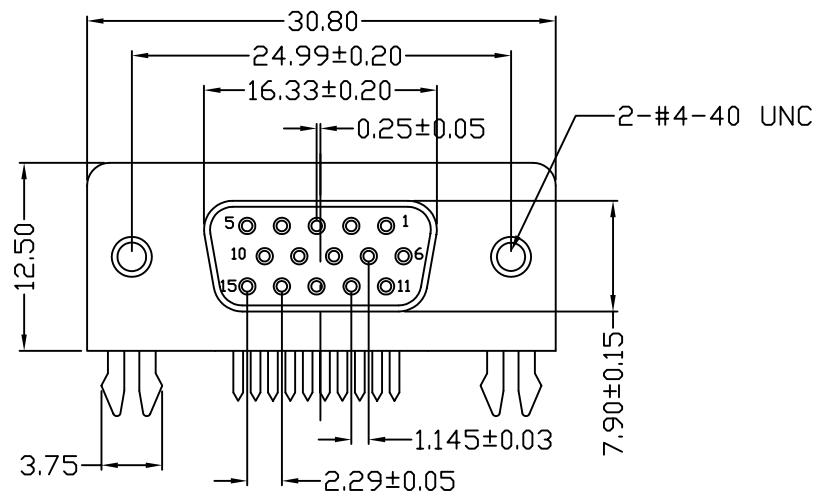




NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold
- 1.4 Shell:Steel,Nickel Plated Brass,Nickel Plated
- 1.5 Screw:

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MW Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55℃ to+105℃

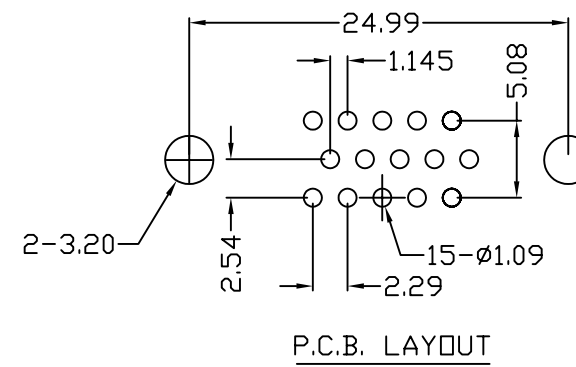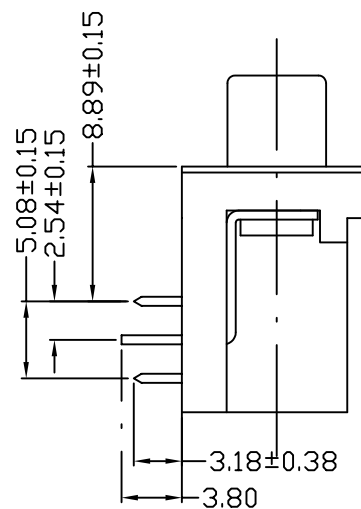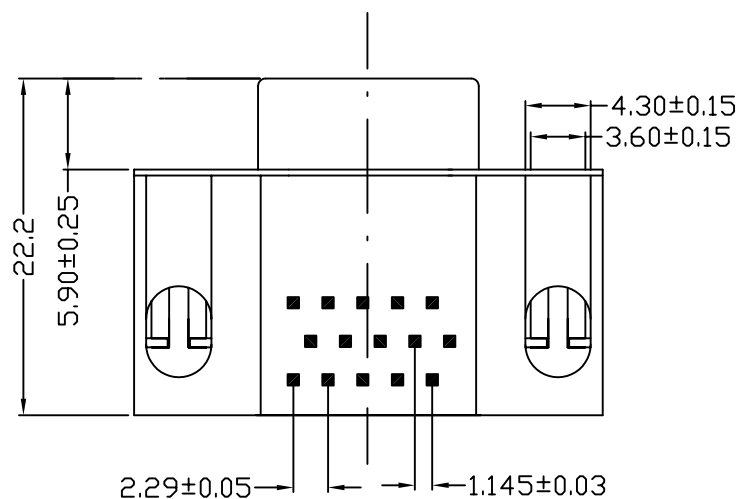

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDR-SGN-15-LF

SERIES
LEADFREE
15 WAY
NUT
GOLD
FEMALE

DESCRIPTION: 15P 8.89母鍍合金黑色