

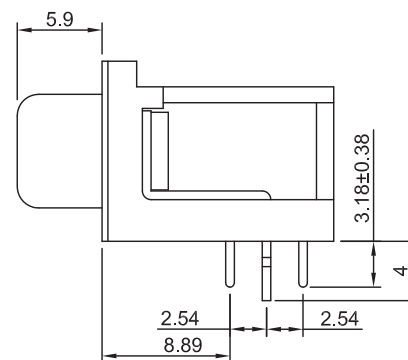


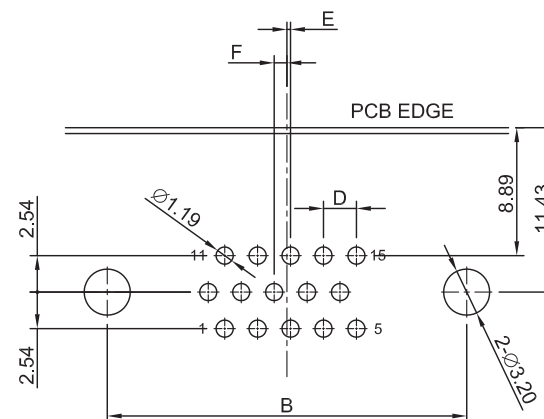

RIVETED INSERT : BRASS, NICKEL PLATED.

OPERATING TEMPERATURE : -55°C ~ +105°C.

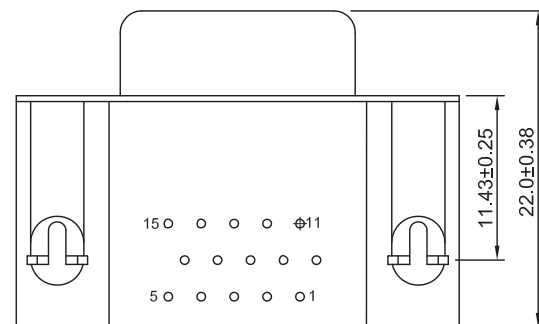

POSITION	A±0.20	B±0.20	C±0.38	D	E	F
15 PIN	16.30	25.00	30.80	2.29	0.25	0.89
26 PIN	24.60	33.30	39.20	2.29	0.51	0.64
44 PIN	38.35	47.05	53.05	2.29	0.51	0.64
62 PIN	54.80	63.50	69.40	2.41	0.58	0.62

照片框

GOLD
FEMALE

DESCRIPTION: HIGH DENSITY D-SUB CONN. RIGHT ANGLE FEMALE FOOTPRINT : 8.89mm