
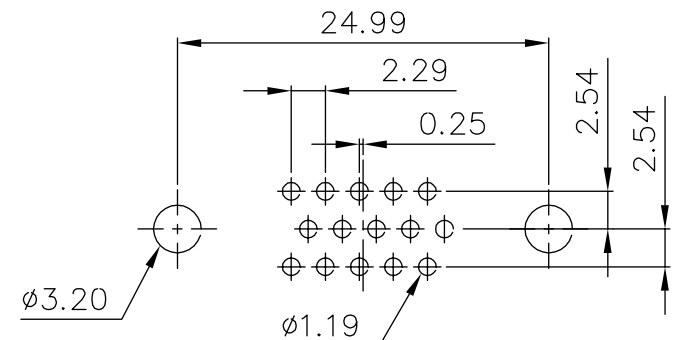
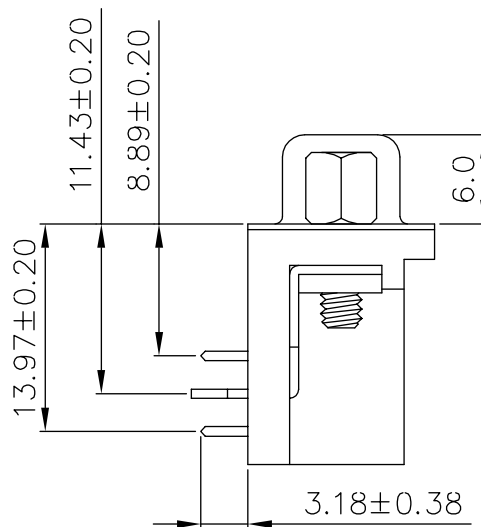
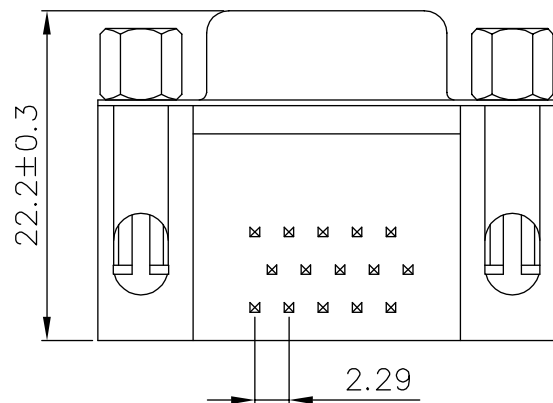


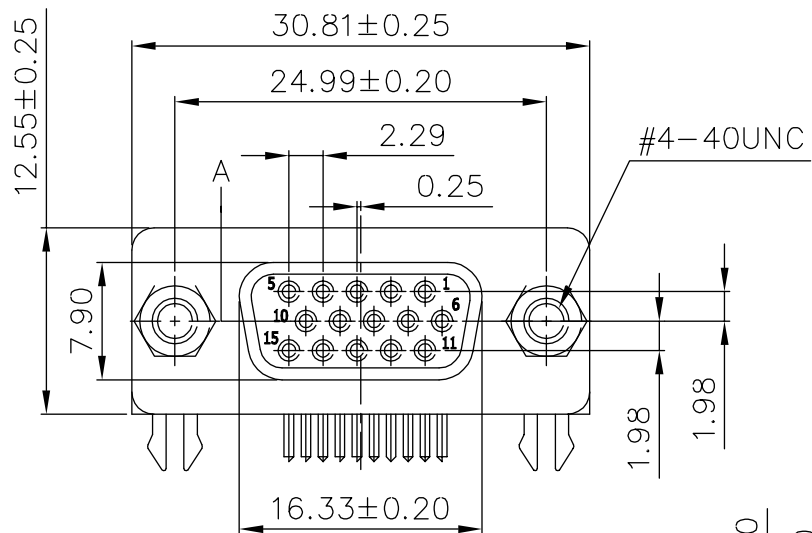

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.
 Shell: Steel with Nickel or Tin or Zinc Plated.

Specification:
 Current Rating: 5 Amps.
 Withstanding Voltage: AC 500V for 1 Minute.
 Resistance: $1000M\Omega$ Min. at DC 500V.
 Contact Resistance: $15m\Omega$ Max..
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION



ORDER INFORMATION

HDR-SGNJ-15-LF
 SERIES | LEADFREE
 15WAY
 JACKSCRW
 NUT
 FULL GOLD

DESCRIPTION: 15P Hi-Density Female D-Sub Right Angle
 Connector Footprint 8.89mm Short Pin 9th Clinch Nut/Screw Lock Type

煜倫股份有限公司

www.morethanall.com