
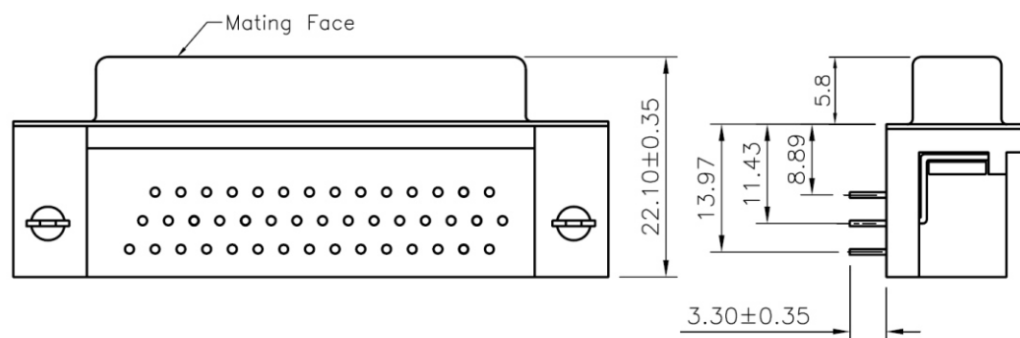


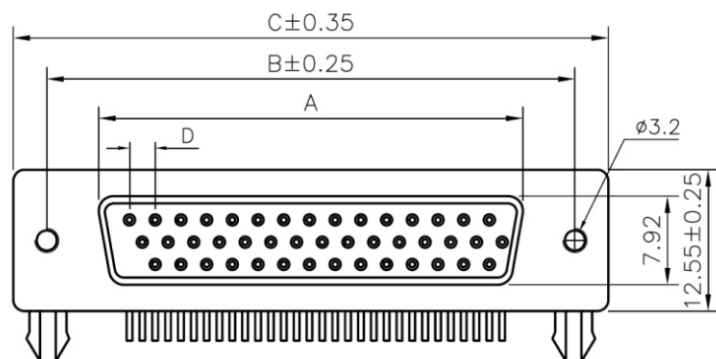

Pos	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.66	33.32	39.14	2.29	0.51
44	38.38	47.04	53.04	2.29	0.51
62	54.84	63.50	69.32	2.41	0.58

Specifications:

Current rating:3.0A AC,DC

Voltage rating:250V AC,DC

Temperature range:-40°C ~ +85°C

Contact resistance:30mohm max.

Insulation resistance: 5,000Mohm min.

Withstanding voltage:1,000V AC/Minute

Materials:


Insulator:High Temp. Plastic (UL 94V-0)

Contact:Copper alloy Nickel Undercoated

,Selective Gold plated

Shell:Metal Iron with Tin plated

Rivet W/Boardlocks

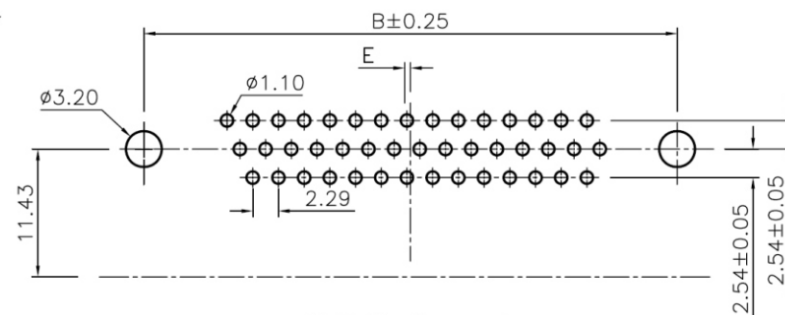

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDR-SSN-xx-LF
SERIES | | | LEADFREE
15-62 WAY
NUT
SEMI GOLD
FEMALE

DESCRIPTION: