
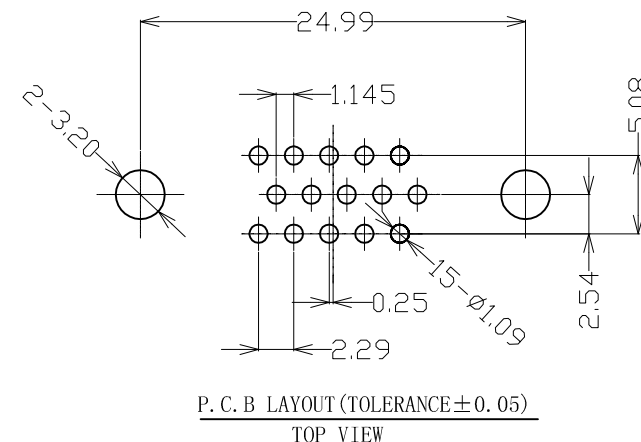
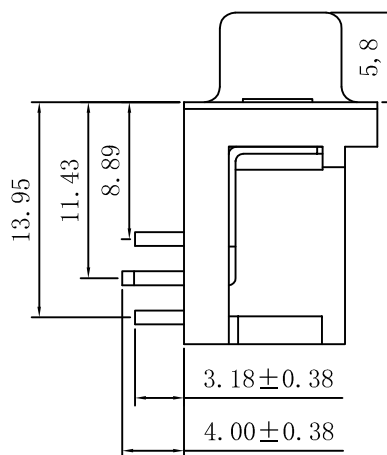
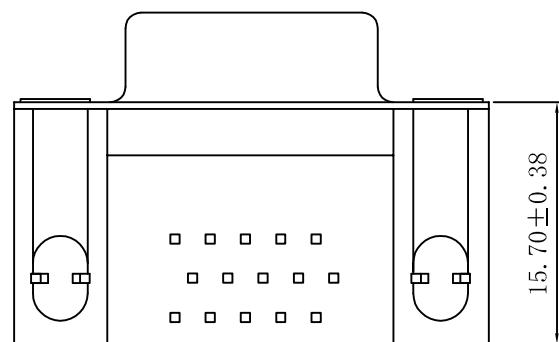


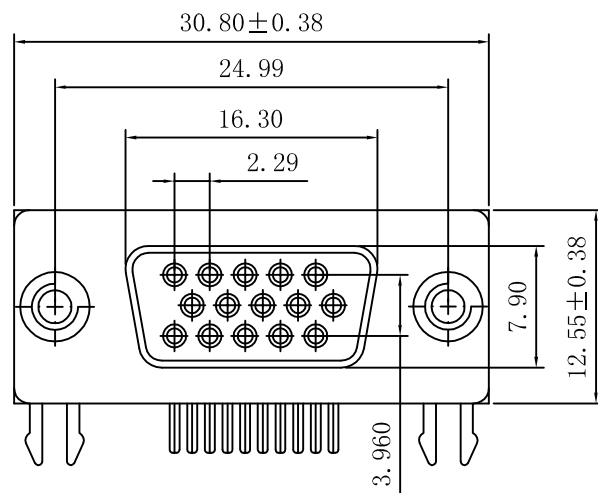

Electrical Characteristics:

1. Current Rating: 5 AMP
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MW Min. at DC 500v.
4. Contact Resistance: 15m Ω Max.
5. Operating Temperature: -40° c to 105° c.

Material:

1. Insulator: PBT+30% Glass Fiber (UL94v-0).
2. Contact: Brass
3. Contact plated: Glod Flash over Tin or Glod Plated Tin Plated
4. Shell: Steel Nickel Plated
5. Housing color: Blue

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

HDR-SSNBL-15-LF
SERIES | | | LEADFREE
| | | 15WAY
| | | BLUE
| | | NUT
| | | SEMI GOLD
| | | FEMALE

DESCRIPTION: HDR 15母 8.89 半金