
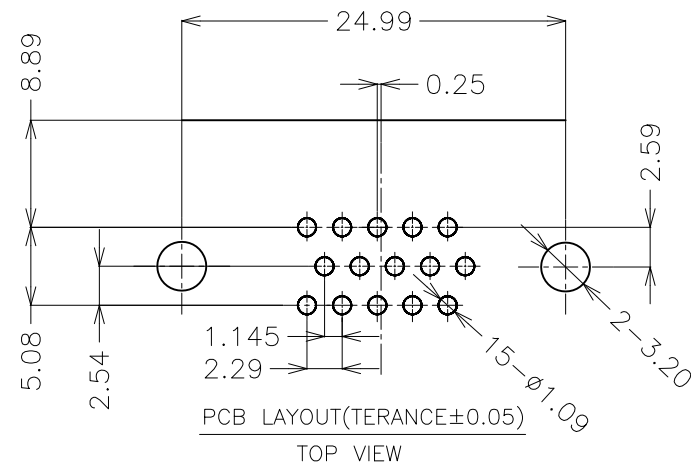
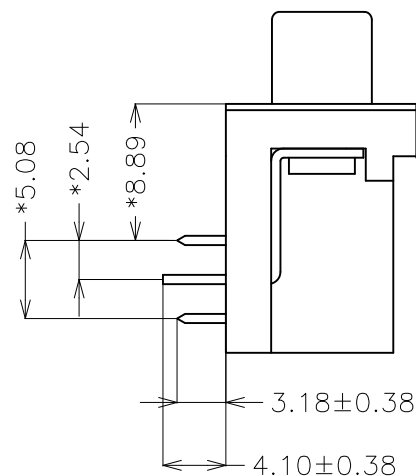
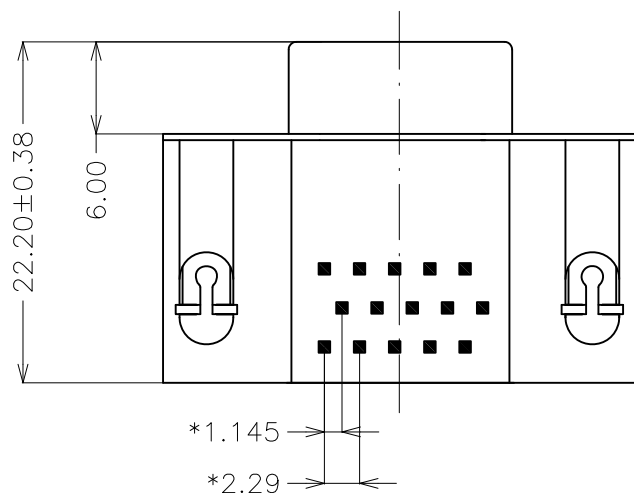


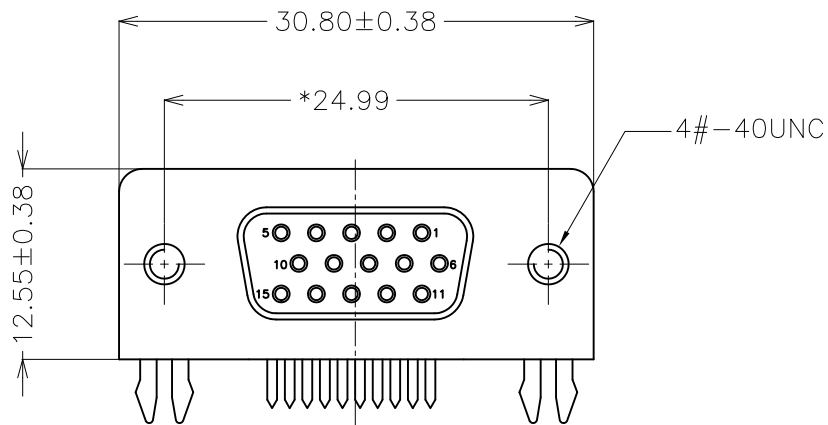

NOTES:

1.MATERIAL

1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)

1.2 Contact: Brass

1.3 Contact Plated:Gold/TIN Plated

1.4 Shell:Spcc,NICKEL Plated

2.SPECIFICATION

2.1 Current Rate:5 Amps


2.2 Contact Resistance:30m Ohms max

2.3 Insulator Resistance:1000MΩ Min. at 500V DC

2.4 Dielectric Strength:500V AC Per minute

2.5 Operation Temperature:-55℃ to +105℃

"*"標示是重點管控尺寸

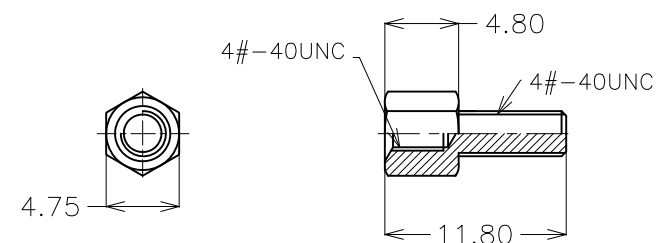

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.38

.XX ± 0.25

.XXX ± 0.15

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDR-SSNH-15-LF

SERIES T T T LEADFREE

15WAY

FEMALE NUT HEX SCRW

SEMI GOLD

DESCRIPTION: HDR 15母8.89鉚附半金黑3.18 簡易型 RoHS