
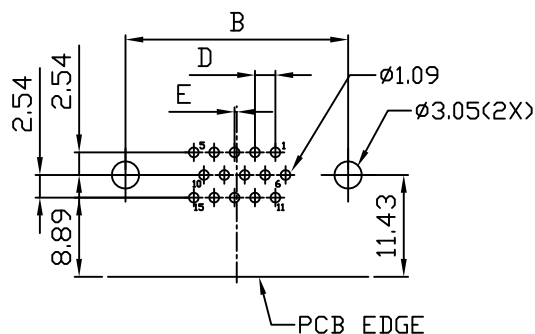
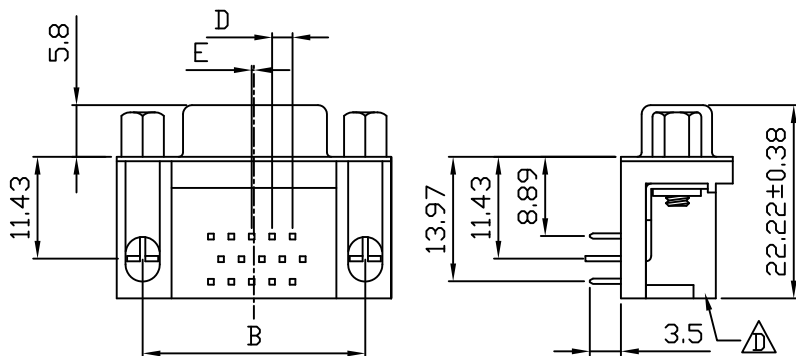


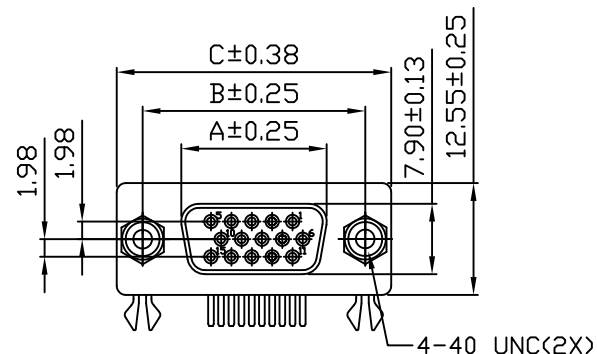

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05(TOP VIEW)

NOTE:

1.MATERIAL:

HOUSING:NYLON 6T,30% GLASS FILLED,UL94-V0,COLOR:BLACK
HOUSING:NYLON 9T,33% GLASS FILLED,UL94-V0,COLOR:BLACK
PC99 COLORFUL INSULATOR:PANTONE #661C
TERMINAL:0.20mm THICKNESS,PHOSPHOR BRONZE C5191H
METAL SHELL:0.40mm THICKNESS,SPCC
BOARD LOCK:BRASS C2680H
NUT & SCREW:BRASS

2.PLATING:

TERMINAL:

CONTACT AREA:SELECTIVE GOLD(Au) PLATING.
SOLDER TAIL:TIN(Sn),THICKNESS=100 MICROINCH MIN/2.54 MICROMETER MIN.
UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN/1.27 MICROMETER MIN.

METAL SHELL:

NICKEL(Ni),THICKNESS=80 MICROINCH MIN/2.03 MICROMETER MIN.
UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN/1.016 MICROMETER MIN.
BOARD LOCK:TIN(Sn),THICKNESS=50 MICROINCH MIN/1.27 MICROMETER MIN.
NUT & SCREW:NICKEL(Ni),THICKNESS=50 MICROINCH MIN/1.27 MICROMETER MIN.

3.RECOMMENDED PCB THICKNESS:1.60+/-0.05mm

NO. OF CONTACT (SHELL SIZE)	DIMENSIONS				
	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.66	33.32	39.14	2.29	0.51
44	38.38	47.04	53.04	2.29	0.51
62	54.84	63.50	69.32	2.41	0.58

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDR-SSNJ-xx-LF
SERIES
FEMALE
LEADFREE
15~62WAY
JACKSCRW
NUT
SEMI GOLD

DESCRIPTION: D SUBMINIATURE RIGHT ANGLE HIGH DENSITY