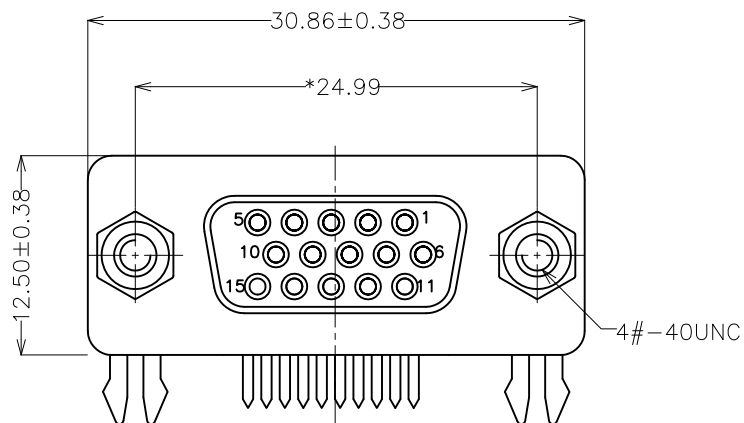


PCB LAYOUT(TOLERANCE±0.05)
TOP VIEW

NOTES :



1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber(UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated:Gold or Tin Plated
- 1.4 Shell:Spcc,Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M Ω Min. at 500V DC
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-55 $^{\circ}$ C to+105 $^{\circ}$ C
- 2.5 Contact Resistance:30m Ω Max

"*"標示是重點管控尺寸

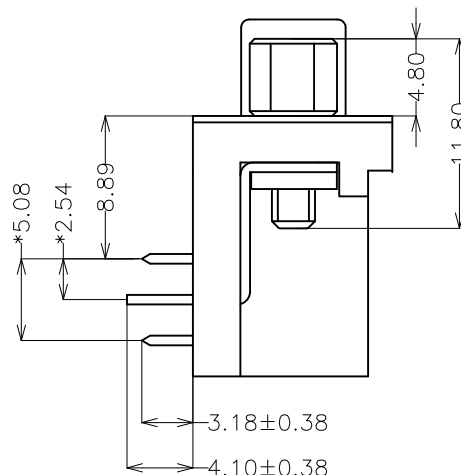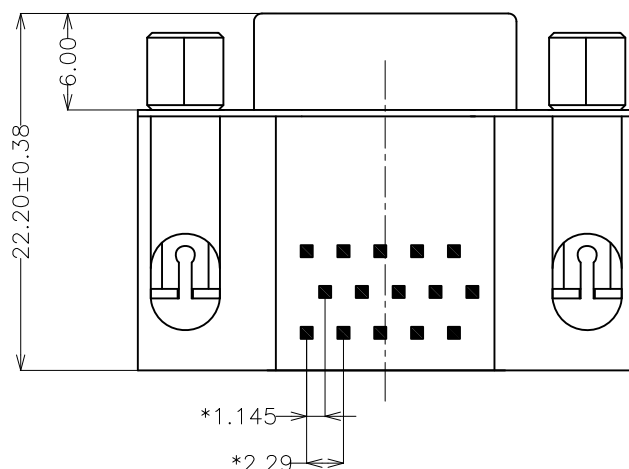

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2 $^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

HDR-SxNJ-15-LF
SERIES T LEADFREE
15WAY
NUT+JACKSCREW
G:FULL GOLD
S:SEMI GOLD
FEMALE

DESCRIPTION: HDR 15母8.89叉鉚鎖半金黑 3.18 不縮9 簡易型