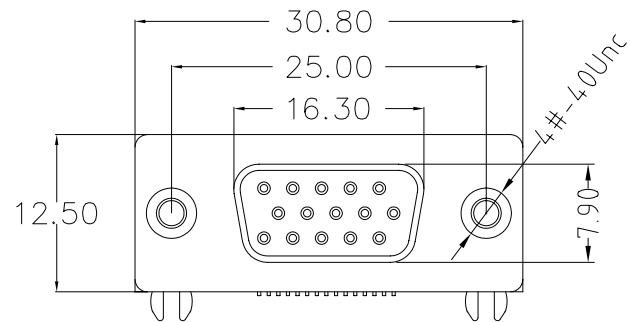



ELECTRICAL CHARACTERISTICS

Contact Current Rating:1Amperes.
Dielectric Withstanding Voltage:AC 500V at sea level.
Insulation Resistance:1000Megohms Min.
Contact Resistance:30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.
Insulator:PBT.Select PA6T /LCP /PA9T
Shell: SPCC.
Z-Piece: Copper Alloy.

RECOMMEND PCB LAYOUT

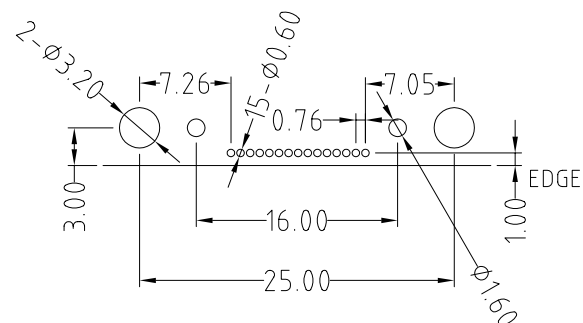

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

ORDER INFORMATION

HDR10-SNZ1-15-LF

SERIES

CLIP

NUT

FEMALE

LEADFREE

15 WAY

DESCRIPTION: