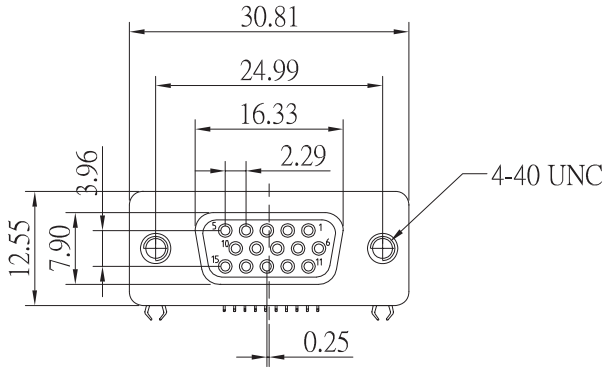



MATERIAL
HOUSING : PBT (UL94V-0) RATED
CONTACTS : BRONZE.
PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE5000MΩ MIN.AT DC 500V.
CONTACTRESISTANCE : 20MΩ MAX.AT DC 100mA.
OPERATING TEMPERATURE : -65˚C~+125˚C.
MAX PROCESSING TEMPERATURE:220˚C FOR3~6 SECONDS.

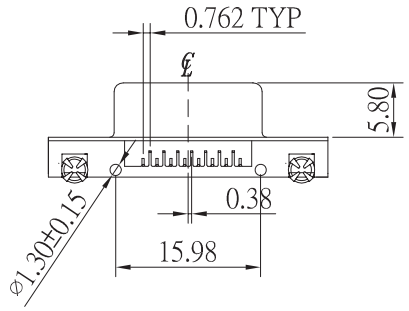

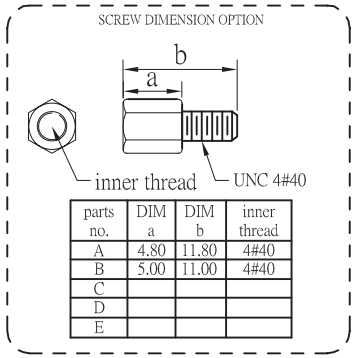

parts no.	DIM a	DIM b	inner thread
A	4.80	11.80	4#40
B	5.00	11.00	4#40
C			
D			
E			

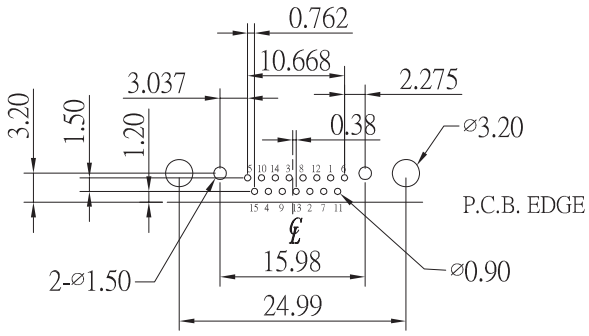

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.50
ANG ± 3°

照片框

ORDER INFORMATION

HDR15-SNRVZ4H-15-LF

SERIES
FEMALE
NUT
CLIP
REVERSED
HEX SCREW
15 WAY
LEADFREE

DESCRIPTION: D-SUB SLIM DIP TYPE (1.20mm) HD15 F Dual Level=1.50mm(7/8 Pin)