
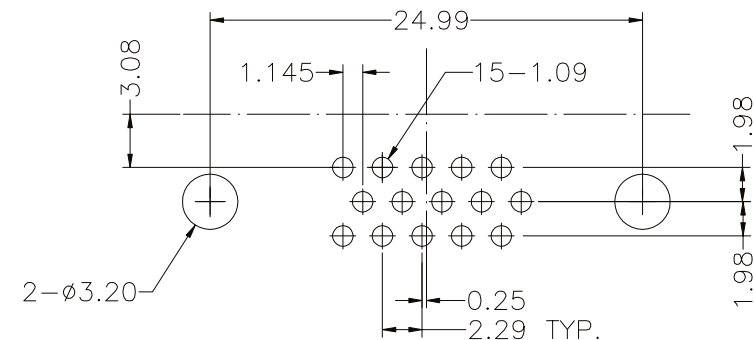
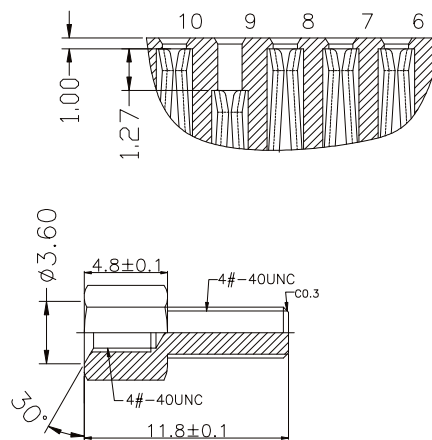


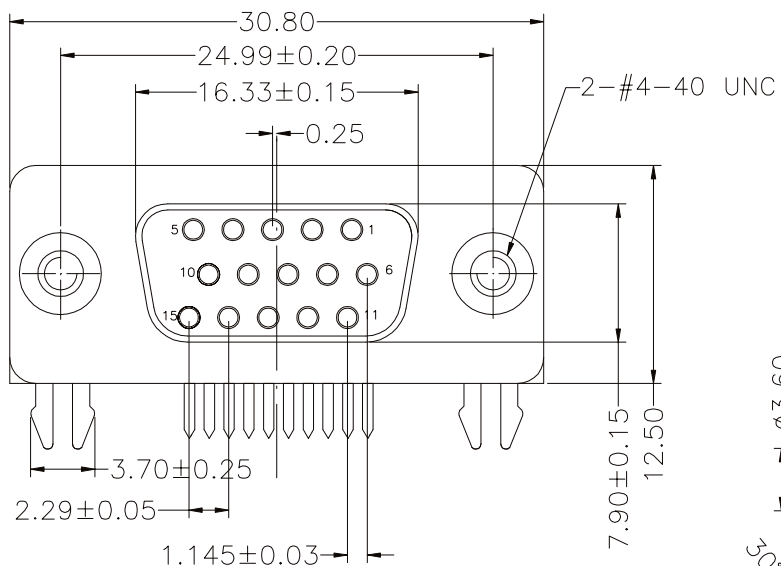

P.C.B. LAYOUT



NOTES:

1.MATERIAL:

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold 3u"or Tin Plated
- 1.4 Shell: Steel, Nickle Plated
- 1.5 SCREW: BRASS, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 5000M Ω Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55°C to+105°C

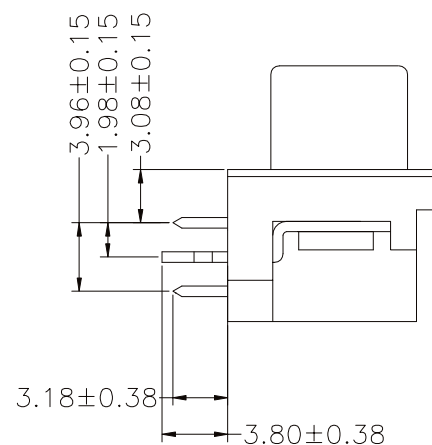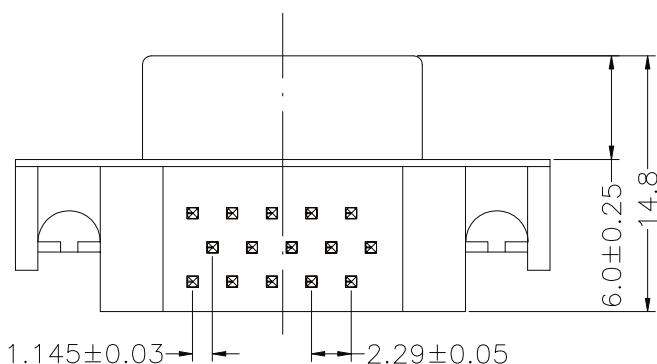

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 1°

ORDER INFORMATION

HDR30-SSNHBL-15S9-LF

SERIES

FEMALE

SEMI GOLD

LEADFREE

SHORT #9

15WAY

BLUE

HEX SCREW

NUT

DESCRIPTION: HDR15PIN 3.08母鉚附半金藍縮9