
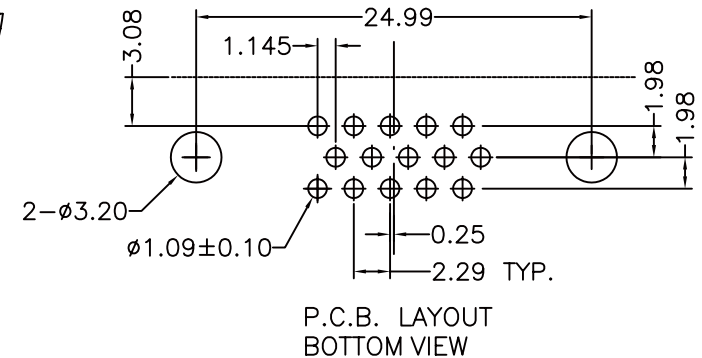


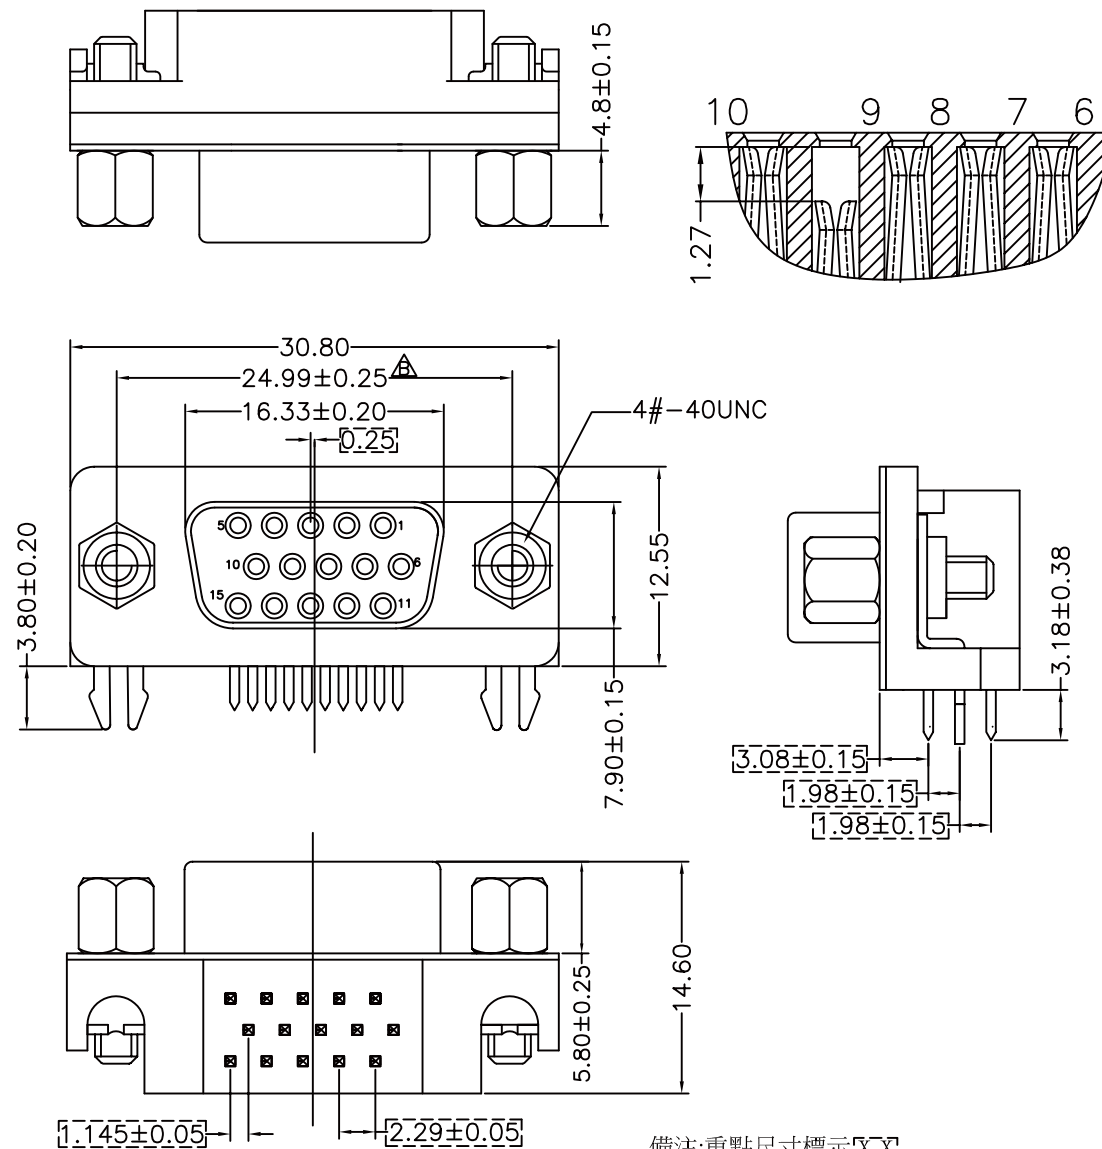

NOTES:

1.MATERIAL:

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold/Tin Plated
- 1.4 Shell: Spcc, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 1000MΩ Min.
- 2.3 Dielectric Strength: 500V AC Per minute
- 2.4 Operation Temperature: -55°C to+105°C
- 2.5 Contact Resistance:30mΩ Max

PART NO	COLOR	PLATED
HDR30-SSNJBL-15S9	BLUE(661C)	GOLD/TIN PLATED

備注:重點尺寸標示XX

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

照片框

ORDER INFORMATION

HDR30-SSNJBL-15S9-LF
SERIES FEMALE SEMI GOLD JACK NUT
BLUE JACKSCREW
15WAY
LEADFREE
EMPTY#9

DESCRIPTION: HDR 15母3.08 叉鉚鎖半金 3.18 縮9 RoHS