


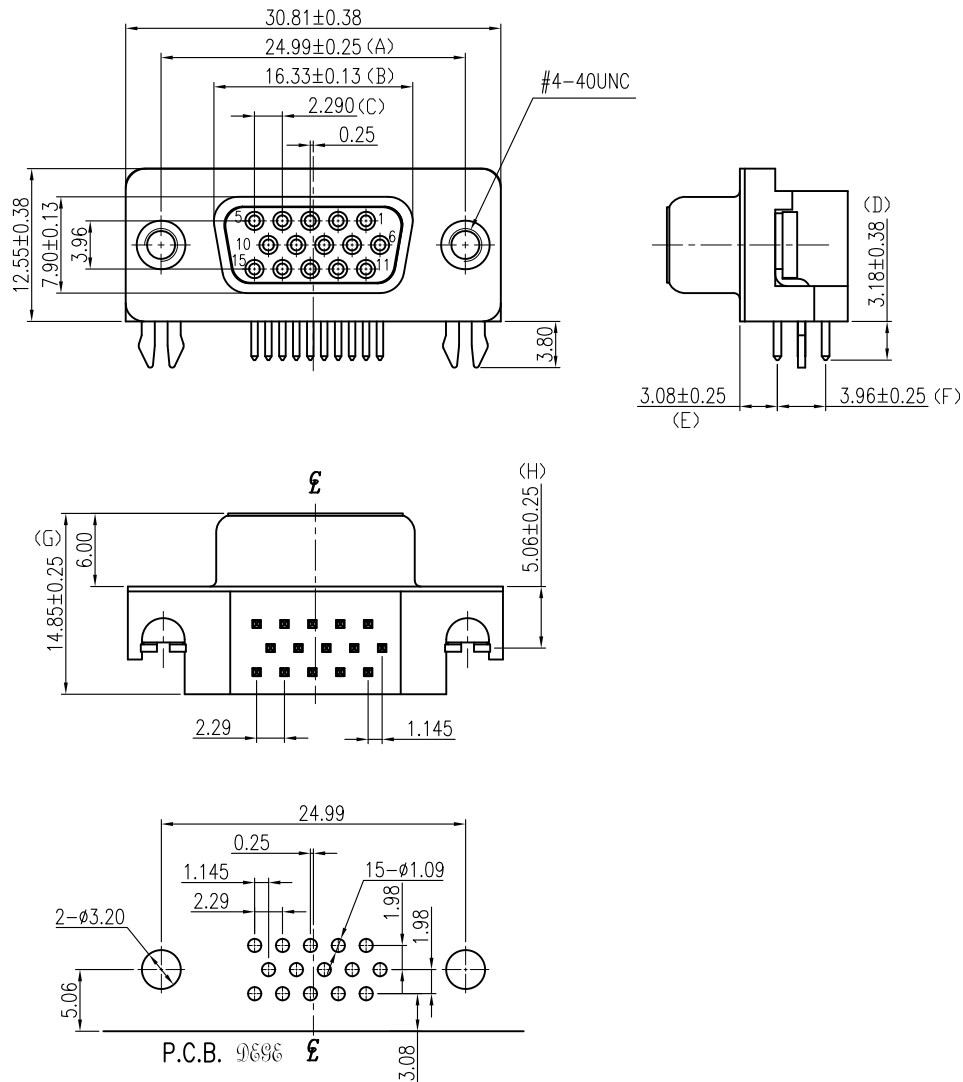

RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(H)

NOTES

- MATERIAL:**
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- D-SUB
- 1 Voltage: 250 VAC(RMS) Max.
- 2 Current Rating: 3 Ampere per Contact
- 3 Contact Resistance: 25 Milliohms Max.
- 4 Insulation Resistance: 5000 Megohms Min.
- 5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 6 Total Mating Force: 6.0 Kgf Max.
- 7 Total Unmating Force: 1.2 Kgf Min.
- 8 Operating Temperature: -55°C to +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

照片框

ORDER INFORMATION

HDR30-SSNxx-15-LF

SERIES

FEMALE

NUT

SEMI GOLD

LEADFREE

15WAY

BK:BLACK

BL:BLUE

DESCRIPTION: MINI BODY D-SUB CONNECTOR 0.121"(3.08mm) FOOTPRINT,RIGHT ANGLE