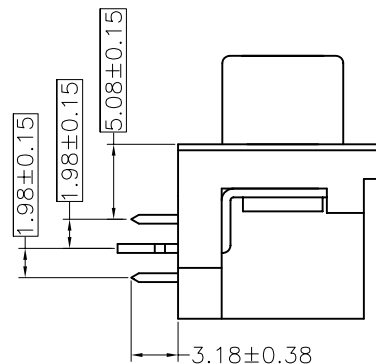
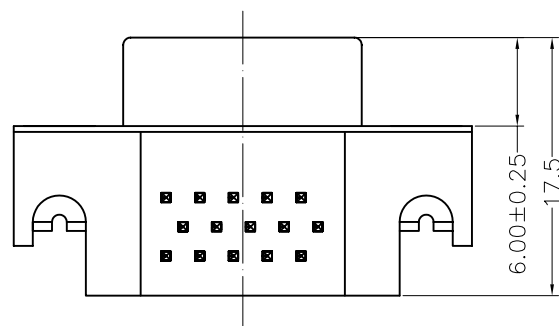
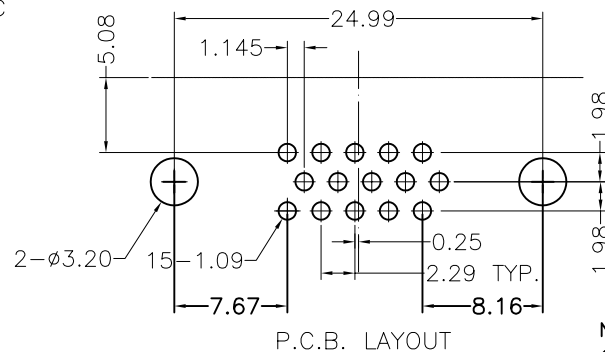
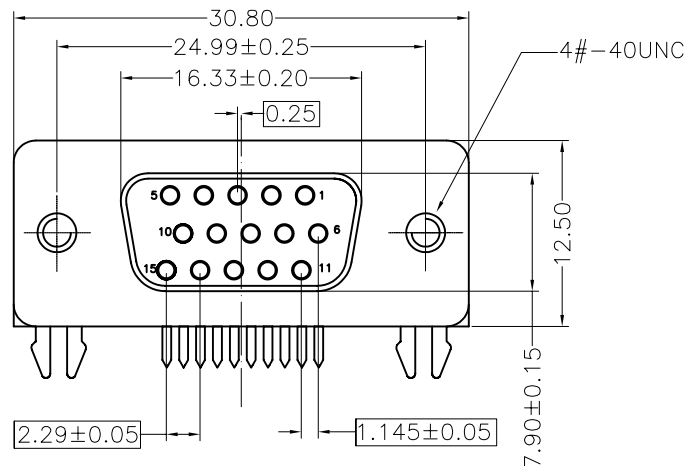


NOTES:

1.MATERIAL:

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold/Tin plated
- 1.4 Shell: Spcc, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 1000M Min. at 500V DC
- 2.3 Dielectric Strength: 500V AC Per minute
- 2.4 Operation Temperature: -55°C to+105°C
- 2.5 MAX PROCESSING TEMPERATURE :
60 SECONDS IN 230°C AND 10 SECONDS IN 260°C

3.ALL MATERIALS/PROCESSES ARE ROHS COMPLIANT

備注:重點尺寸標示 ☒ ☒

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDR30-SSNH-15S9-LF

SERIES FEMALE SEMI GOLD NUT
LEADFREE
EMPTY#9
15WAY
HEX SCREW

DESCRIPTION: HDR 15母5.08鉚附半金黑3.18 縮9